

Contents

Ver. 1.0

	Slide No.
What is Mlib 3.7 on Visual Studio	1
How to install Visual Studio Community	2
How to start Visual Studio Community 2019	4
How to create new project in Community edition	6
How to install Visual Studio Express	11
How to start Visual Studio Express	13
How to create new project in Community edition	14
How to register Mlib in new project	16
How to create and compile(build and debugg) a program	20
How to set initial window	24
How to draw figures and use functions for figures	29

What is mlib 3.7?

Mlib is GUI(Graphical User Interface) based data visualization library on MS Visual C++

1. Input and output of text or number through edit box
2. Checkbox or radio button for flag condition Setting
3. 1D drawing or 2D image of array data
4. Animation of objet with simple shape

The screenshot shows the Mlib for G++ Language v3.77 GUI. It features a control panel at the top with various settings and a main display area with multiple plots. Annotations with arrows point to specific UI elements:


- Button**: Points to the 'Set' button in the control panel.
- Execute program**: Points to the 'TEST' button.
- Edit box**: Points to the 'Sampling' input field.
- Input and output**: Points to the 'ADC range' radio buttons.
- Figure window**: Points to the top-left plot showing amplitude vs. time.
- Graphic window**: Points to the bottom-right plot showing power vs. frequency.
- Text output area (printf function)**: Points to the text area on the right side of the GUI.
- Check box**: Points to the 'Cut' checkbox.
- Radio button**: Points to the '2.5V' radio button in the ADC range section.

Microsoft Visual Studio

Microsoft Visual Studio is an integrated development environment (IDE) from Microsoft. It is used to develop **computer programs**, as well as websites, web apps, web services and mobile apps.

Visual Studio supports many programming languages such as C++, Visual Basic.NET, C# etc. This lecture uses only C++ for Windows application.

The most basic edition of Visual Studio, the **Community edition**, is available free of charge. The **Express edition** is older version and is also free.

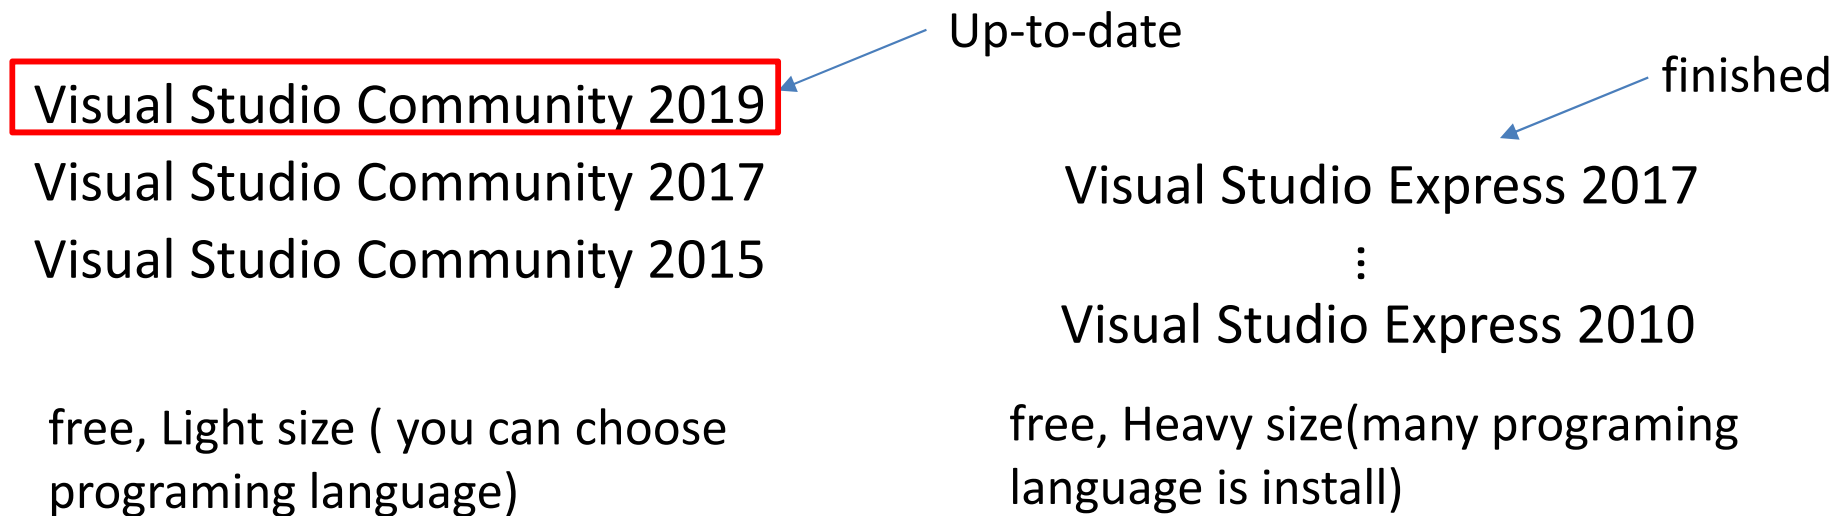

**Whichever you can use.
Community 2019 is recommended.**

How to install Visual Studio Community


'Visual Studio **community** 2019' can select programming language or development hardware such as web application, android or iOS.

You can learn Visual Studio Community below

<https://docs.microsoft.com/en-us/visualstudio/?view=vs-2019>

Download '**vs_Community.exe**' which is an on-line install application of the up-to-date version of visual studio community (Now → 2019)

Execute '**vs_Community.exe**'. After system check, the following window will open.

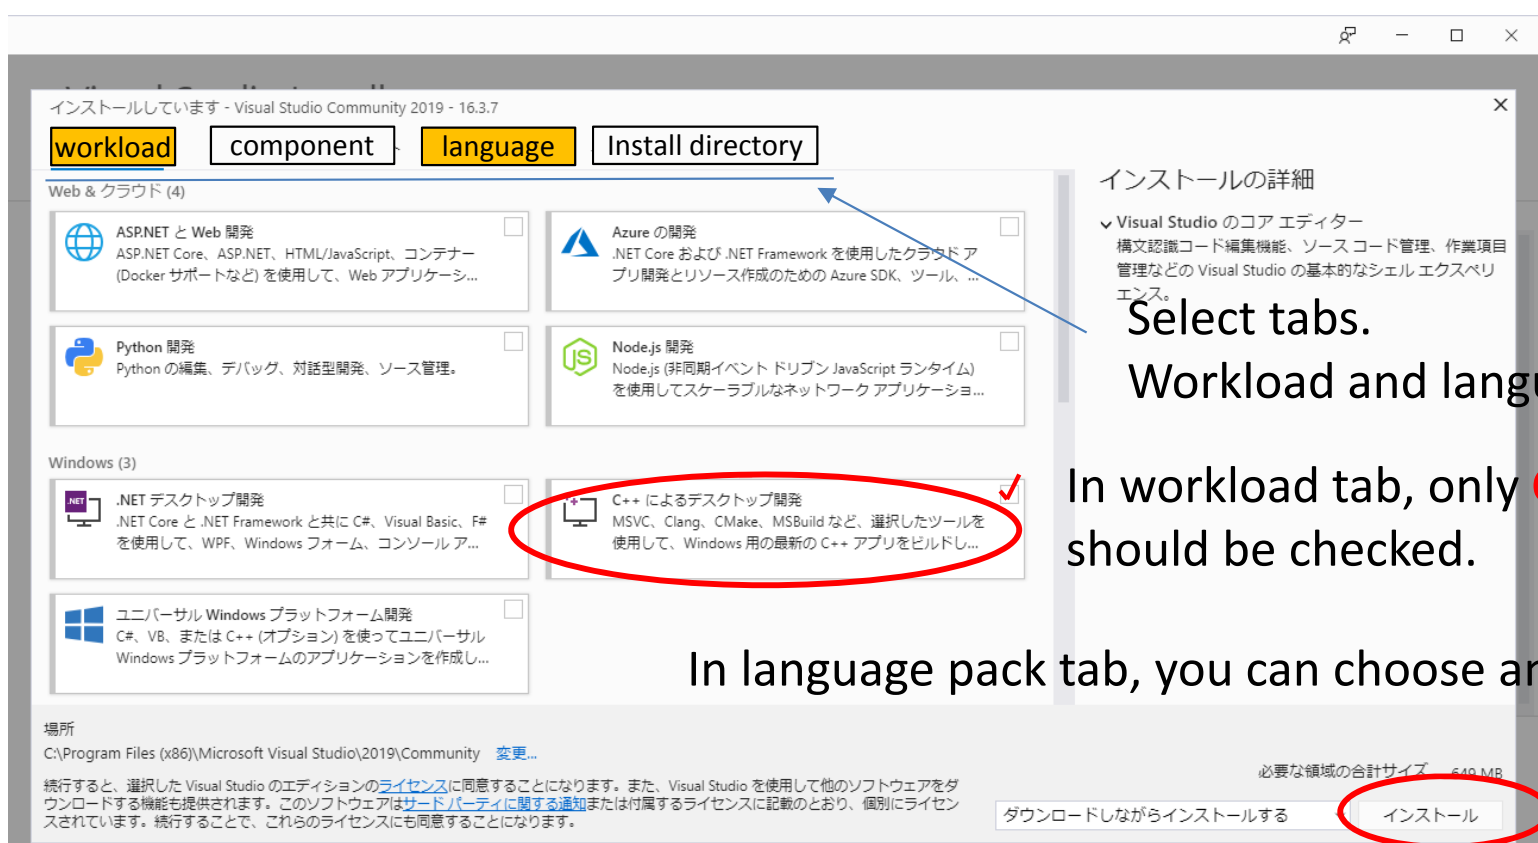

The screenshot shows the Visual Studio Community 2019 installer window. At the top, there are four tabs: 'workload', 'component', 'language', and 'Install directory'. The 'workload' tab is selected, showing a grid of workload options. The 'C++によるデスクトップ開発' (C++ Desktop Development) workload is circled in red and has a checkmark. The 'language' tab is also highlighted with a blue arrow. On the right side, there is a text box that says 'The language of the installer depends on language environment of your PC.' Below this, there are instructions: 'Select tabs. Workload and language are important.' At the bottom right, the 'インストール' (Install) button is circled in red. The bottom of the window shows the installation path and a 'ダウンロードしながらインストールする' (Install while downloading) button.

The language of the installer depends on language environment of your PC.

Select tabs.
Workload and language are important.

In workload tab, only **C++ desktop environment** should be checked.

In language pack tab, you can choose any multiple languages.

Then, install

How to install Visual Studio Community



The screenshot shows the Visual Studio Installer window. The title bar reads "Visual Studio Installer". Below the title bar, there are two tabs: "インストール済み" (Installed) and "使用可能" (Available). The main content area shows the installation progress for "Visual Studio Community 2019", which is circled in blue. The progress bar indicates that 98% of the 1.72 GB has been downloaded and verified at a speed of 7 MB/sec. Below the progress bar, it shows "インストールしています: パッケージ 0/0" (Installing: Packages 0/0) at 0%. There is a "一時停止" (Pause) button to the right of the progress bar. Below the progress bar, there is a checkbox for "インストール後に起動する" (Start after installation) which is checked. There is also a link for "リリースノート" (Release notes). On the right side of the window, there is a section for "開発者向け情報" (Information for developers) with several links and dates.

Visual Studio Installer

インストール済み 使用可能

Visual Studio Community 2019

一時停止

ダウンロードして確認中: 1.72 GB/1.72 GB (7 MB/秒)

98%

インストールしています: パッケージ 0/0

0%

Windows 復元ポイントを作成しています...

インストール後に起動する

[リリースノート](#)

開発者向け情報

[Microsoft C++ Team At CppCon 2019: Videos Available](#)

Last month a large contingent from the...
2019年11月1日金曜日

[Announcing the Azure Boards app for Microsoft Teams](#)

Developers today rely on communication...
2019年10月30日水曜日

[Start building with Azure Cognitive Services for free](#)

ヘルプが必要ですか。 [Microsoft Developer Community](#) をご確認くださいか、 [Visual Studio サポート](#) にお問い合わせください。

インストーラー バージョン 2.3.2217.1010


Wait for 30 minutes

After completing install and restarting PC, you can find the following application in start menu.



How to start Visual Studio Community 2019

Hereafter, the instructions is done under Visual Studio Community.

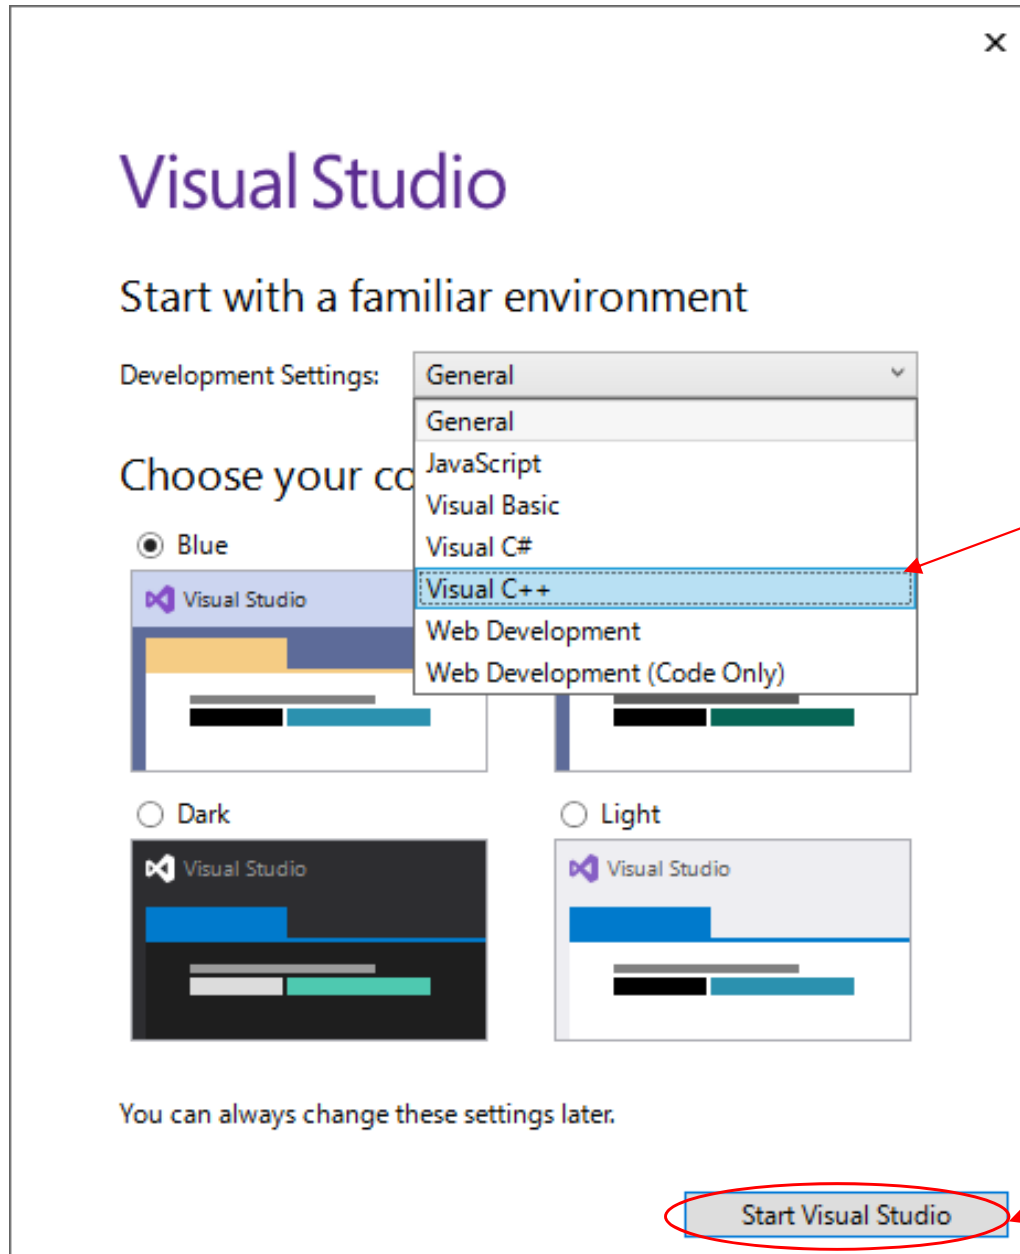

When you firstly start Visual Studio Community, passing sign-up dialog, the following dialog appears.

Choose Visual C++.

When you make an executable application working on Windows, a **project** for visual C++ should be created for one application.

Start Visual Studio.

Project wizard

A project in 'Visual Studio' is container including C-source files, header files, linker, debugger or etc.

Visual Studio 2019

Open recent

As you use Visual Studio, any projects, folders, or files that you open will show up here for quick access.

You can pin anything that you open frequently so that it's always at the top of the list.

If you want to open an existing project, click here.

Get started



Clone or check out code

Get code from an online repository like GitHub or Azure DevOps



Open a project or solution

Open a local Visual Studio project or .sln file



Open a local folder

Navigate and edit code within any folder



Create a new project


Choose a project template with code scaffolding to get started

[Continue without code](#) →

Click 'create a new project'.

Creating new project(1)

Caution: you have to strictly follow the following instruction to create new project.

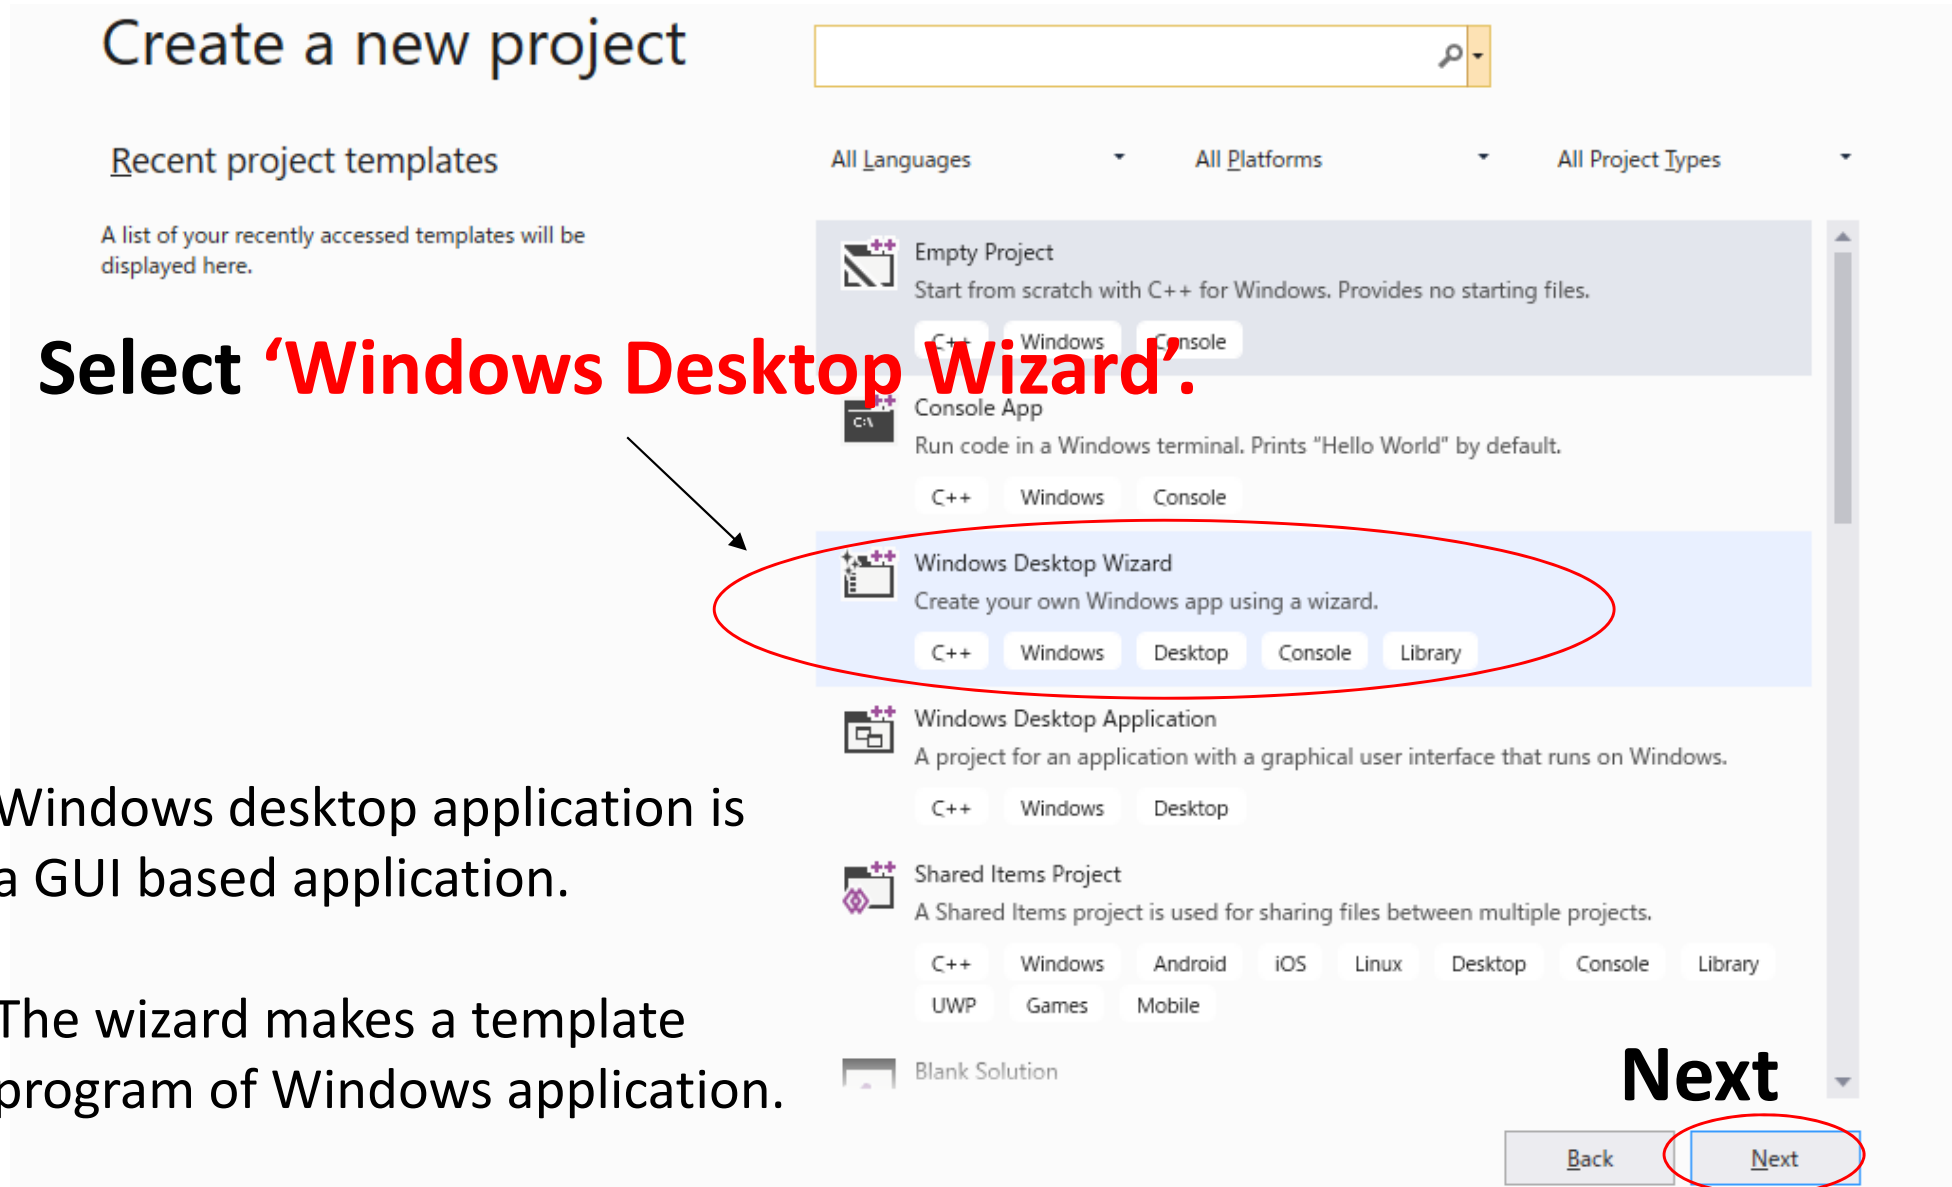

Select 'Windows Desktop Wizard'.

Windows desktop application is a GUI based application.

The wizard makes a template program of Windows application.

Next

Creating new project(2)

Configure your new project

Windows Desktop Wizard C++ Windows Desktop Console Library

Project name

Project1

Enter project name.

Location

C:\Users\miwa\source\repos

Make sure location of project.

Solution name *i*

Project1

Place solution and project in the same directory

The **home directory** of this project is created in the lower level of this directory.

Caution:
all the C-source file or header file which you need should be placed at the **home directory**.

Next


Back Create

Creating new project(3)

Caution: you have to strictly follow the following instruction to create new project.

Mlib is C-based header files with many functions for visualization.

It also plays a role as a template program of **Desktop application**.

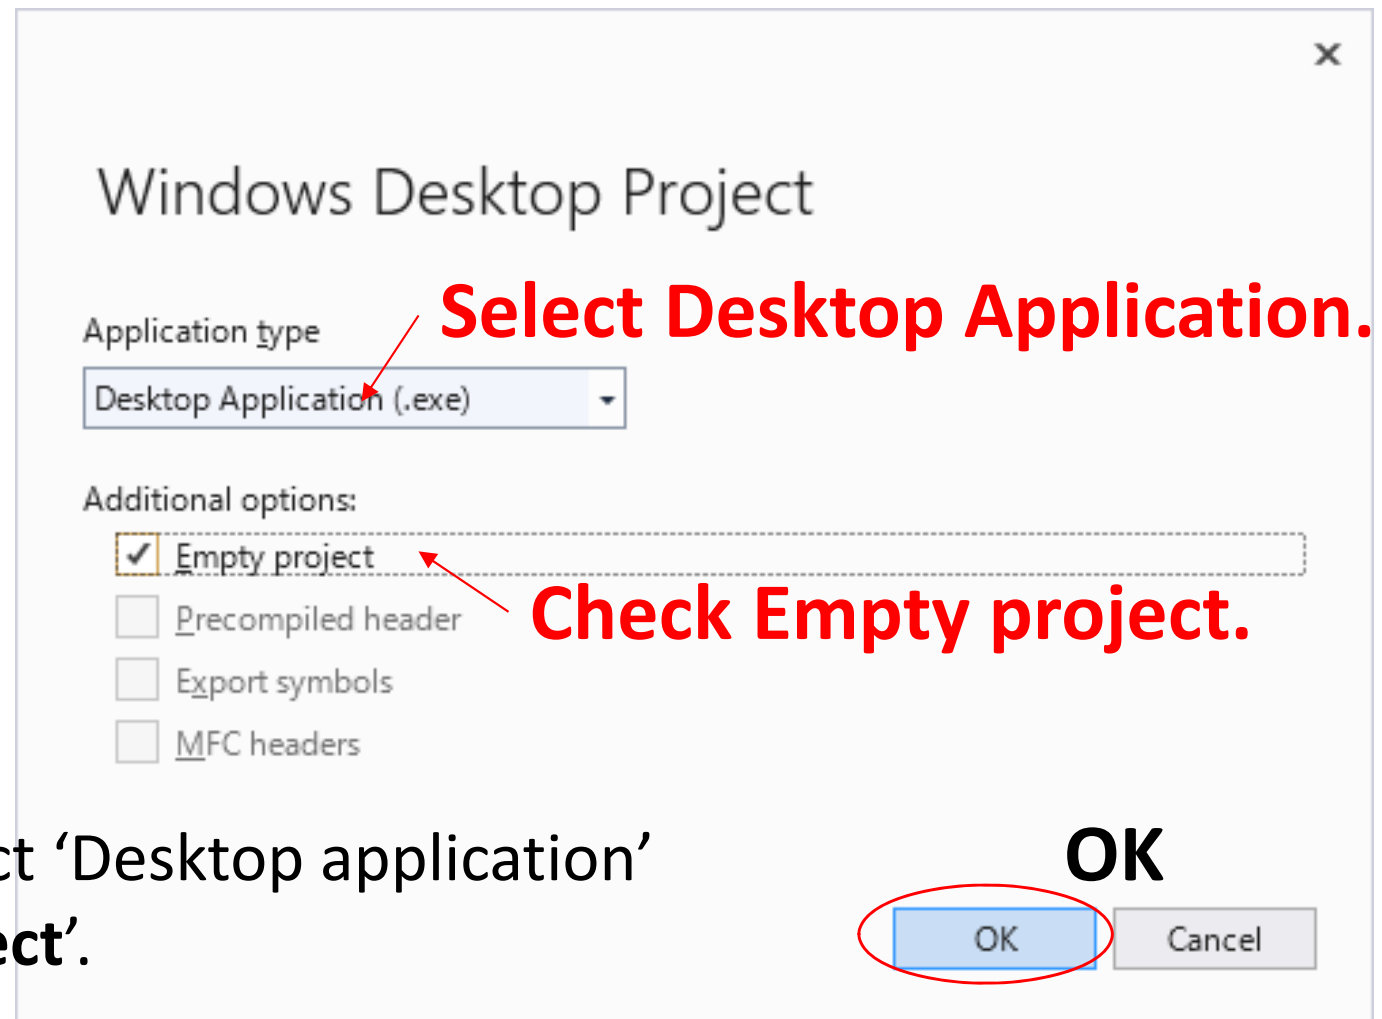

Here, you have to select 'Desktop application' and check '**Empty project**'.

How to install Visual Studio Express 2017


Visual Studio Community 2019 is up-to-date version. **But 'Visual Studio Express 2017' is also available.**

Here, it is introduced how to install 'Visual Studio **Express 2017**'

You can easily find 'Visual Studio Express 2017'on web search.

Executable file 'vs_WDEExpress.exe' is an installer for multi languages.

After install vs_WDEExpress.exe, the following window will open.

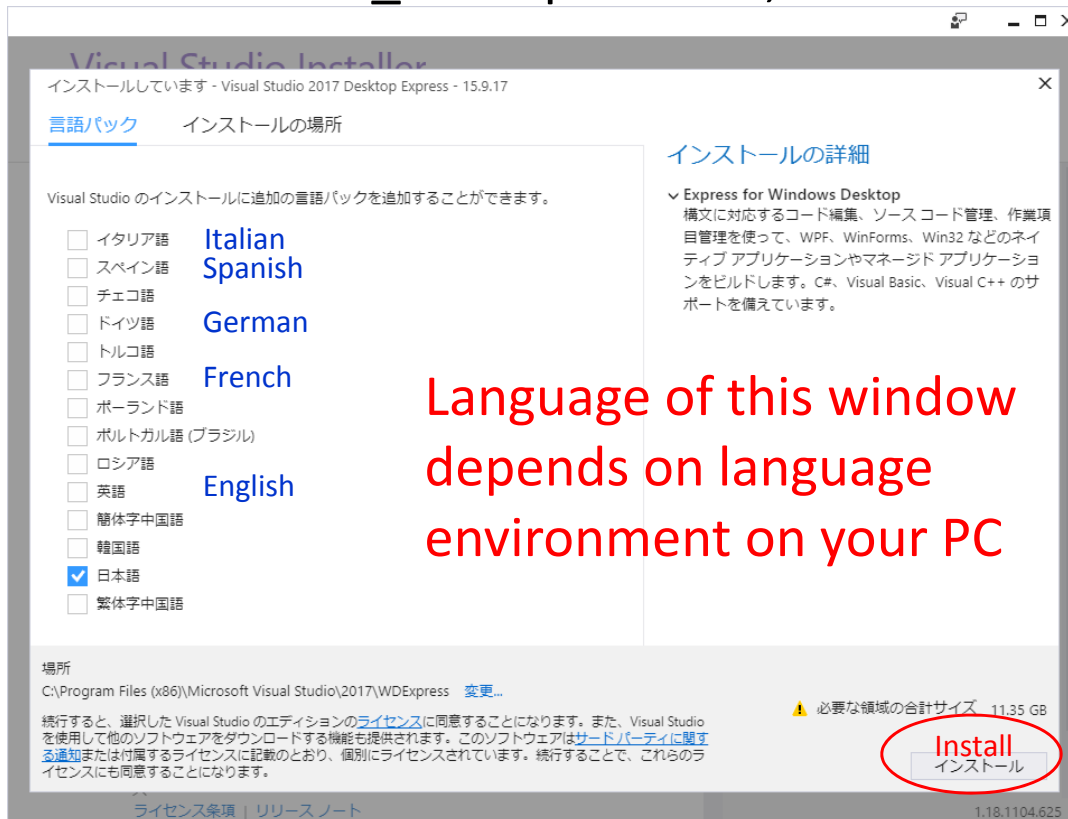


Language of this window depends on language environment on your PC

Please select your favorite language.

Available for multiple languages


Click Install

How to install Visual Studio Express 2017

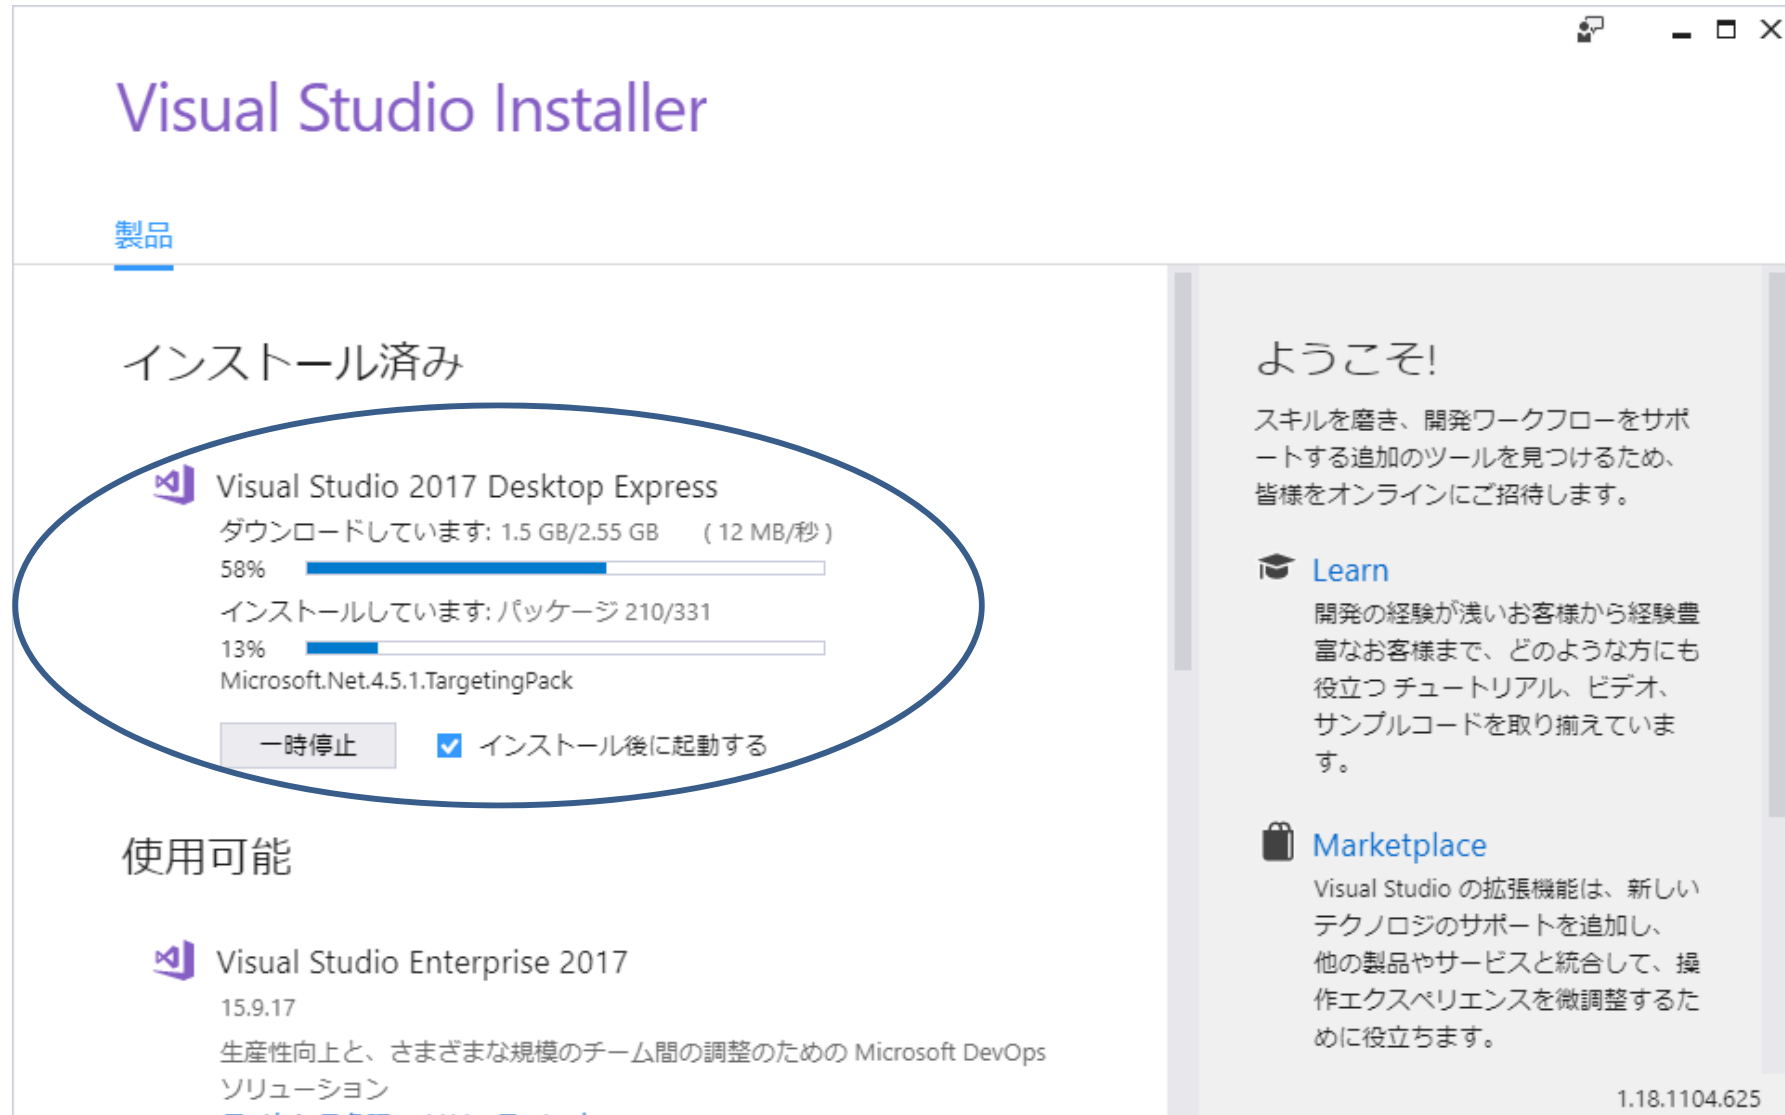

Wait for 20 or 30 minutes


After completing install, you can find the following application in start menu



How to start Visual C++

Whichever you install, the following instruction is same.
When you make an executable application working on Windows,
One **project** is needed for one program.

Left click.
Select Create New
Project.

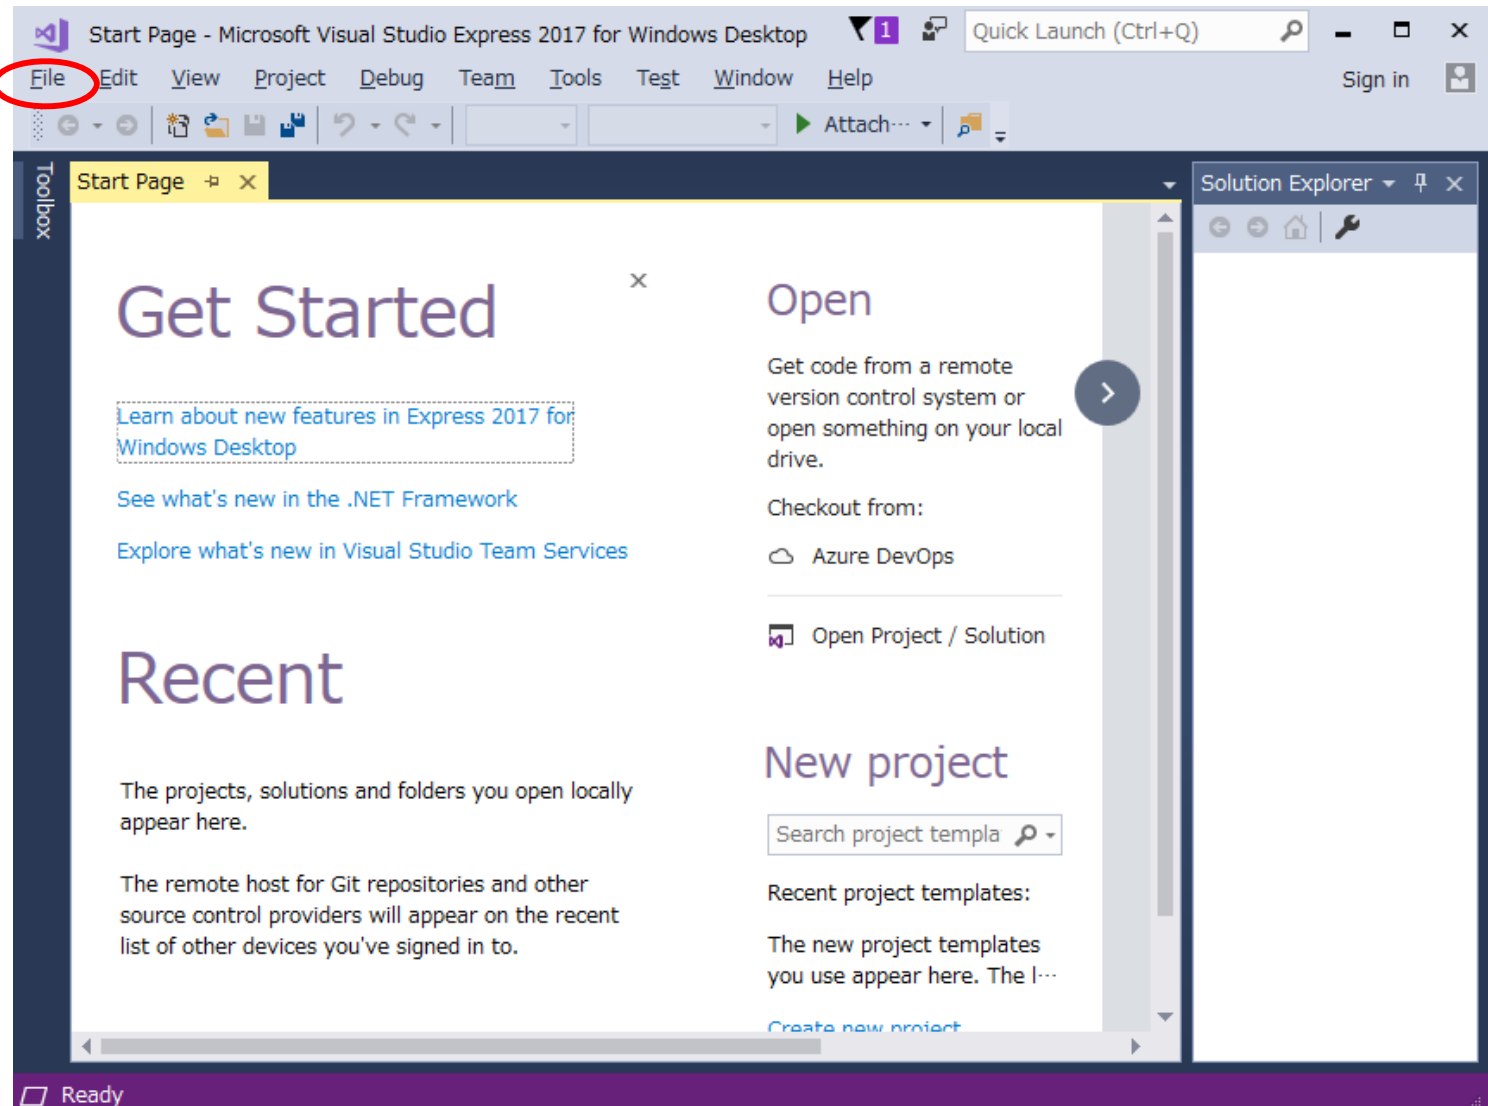


Project in Visual Studio is container including c-source files, header files, linker, debugger or etc.

Creating new project

Caution: you have to strictly follow the following instruction to create new project

1. Select Visual C++ → Click Windows Desktop

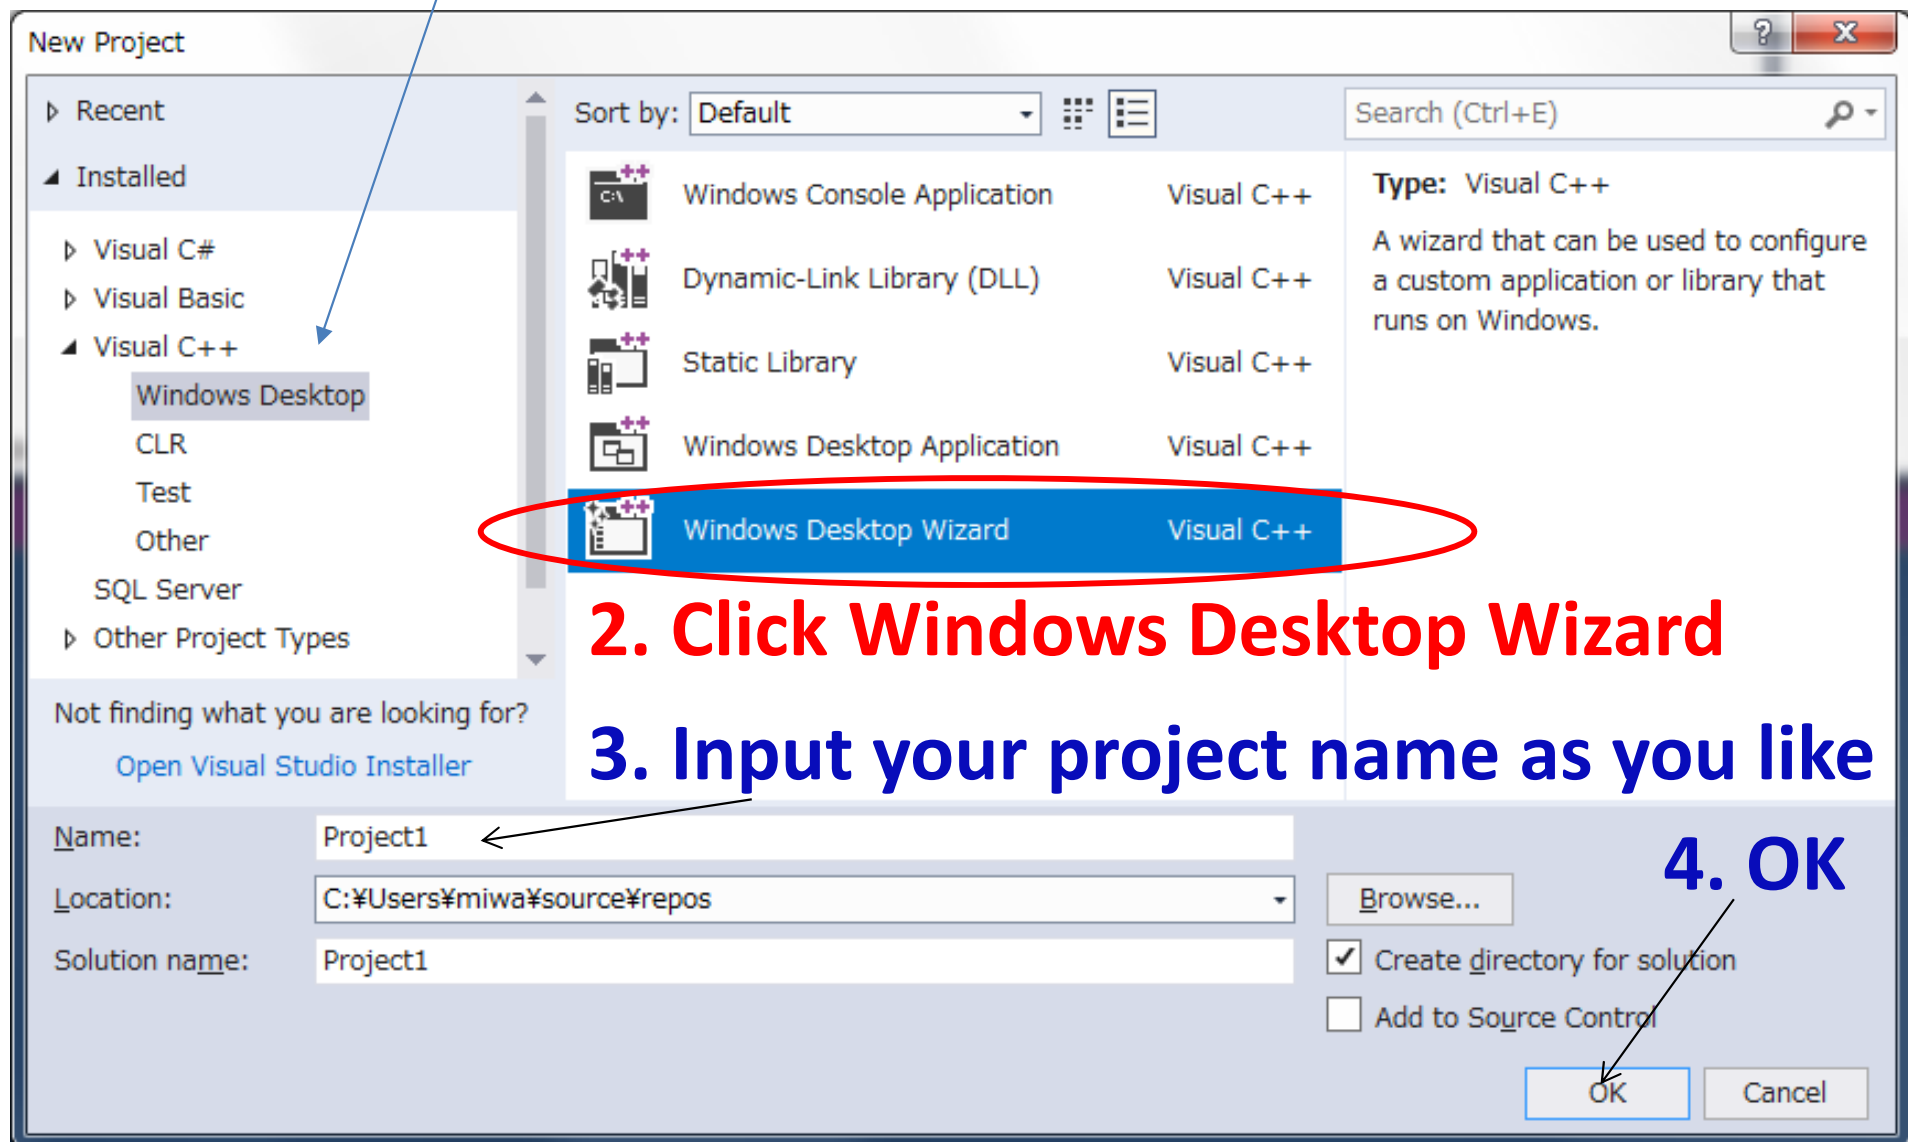

2. Click Windows Desktop Wizard

3. Input your project name as you like

4. OK

Windows desktop wizard


Windows desktop application is a GUI based application.

The wizard makes a template program of Windows application.

Mlib is C-based header files with many functions for visualization.

Moreover, it also plays a role as a template of Windows application.

Here , you have to select 'Windows application' and check 'Empty Project'

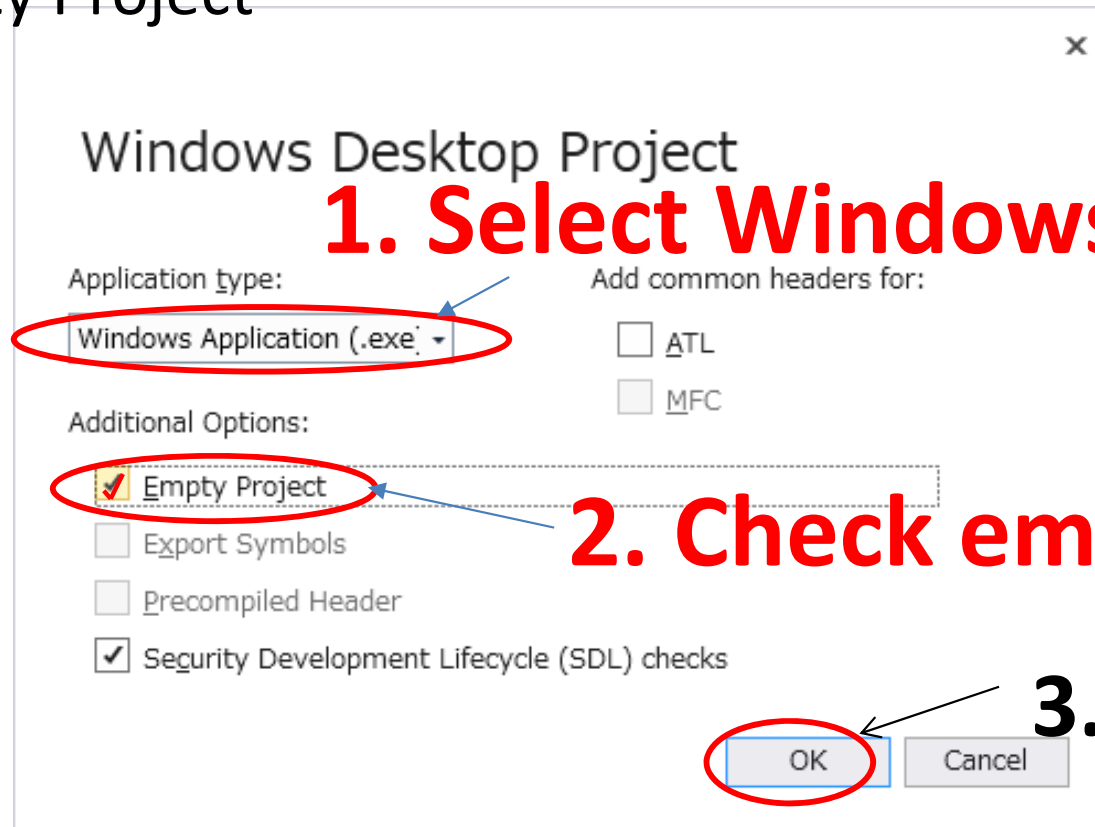

1. Select Windows application

2. Check empty project

3. Complete

Initial screen of project

When Project name is Project2

Make sure solution explorer like this

Make sure the home directory of this project

Project2 Project Properties	
Misc	
(Name)	Project2
Project Dependencies	
Project File	<u>C:\Users\miwa\source\repos\Project2\Project2\Project2.vcxproj</u>
Root Namespace	Project2

(Name) Specifies the project name.

Confirmation of project creation


You have to confirm the location of the home directory

C:\Users\username\source\repos\Project2\Project2

Caution: Not one or two level lower

Using Windows explorer,
find your home directory.


The project name is
assumed to be 'Project2'.

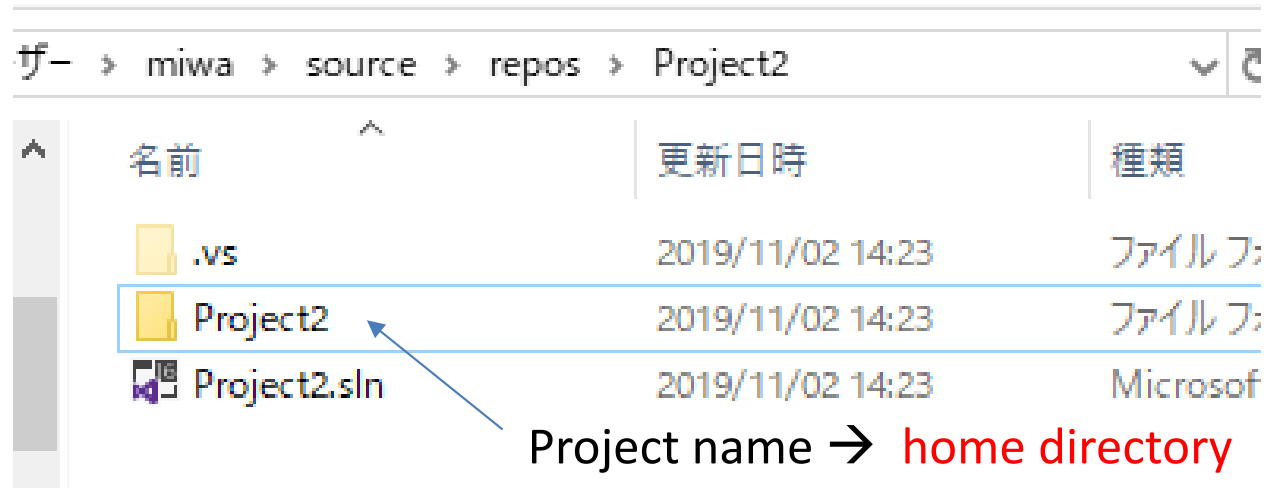

View inside the home directory.

Caution:

All the C-source file or header file which you need should be placed at the home directory.

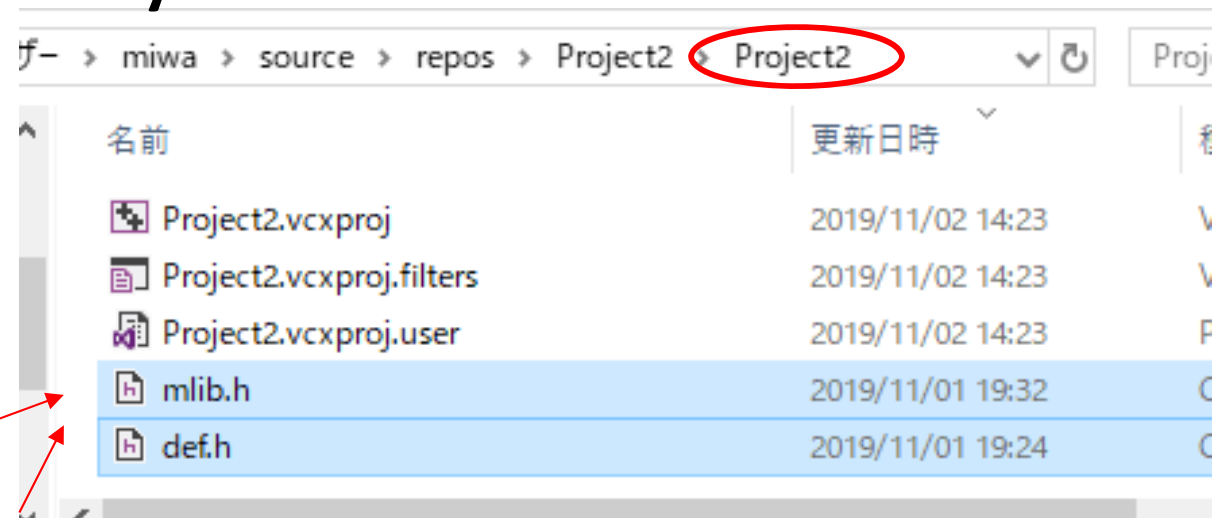

Add 'mlib.h' and 'def.h' here manually.


Registering files to project

As the project is empty, so some files should be registered in project.

Solution Explorer can view header files, resource files, source files to use for the project.


Register mlib.h and def.h in Header Files.

How to add
Right Click **Header files**
Select Add
Select Existing item
Select mlib.h and def.h copied at home directory

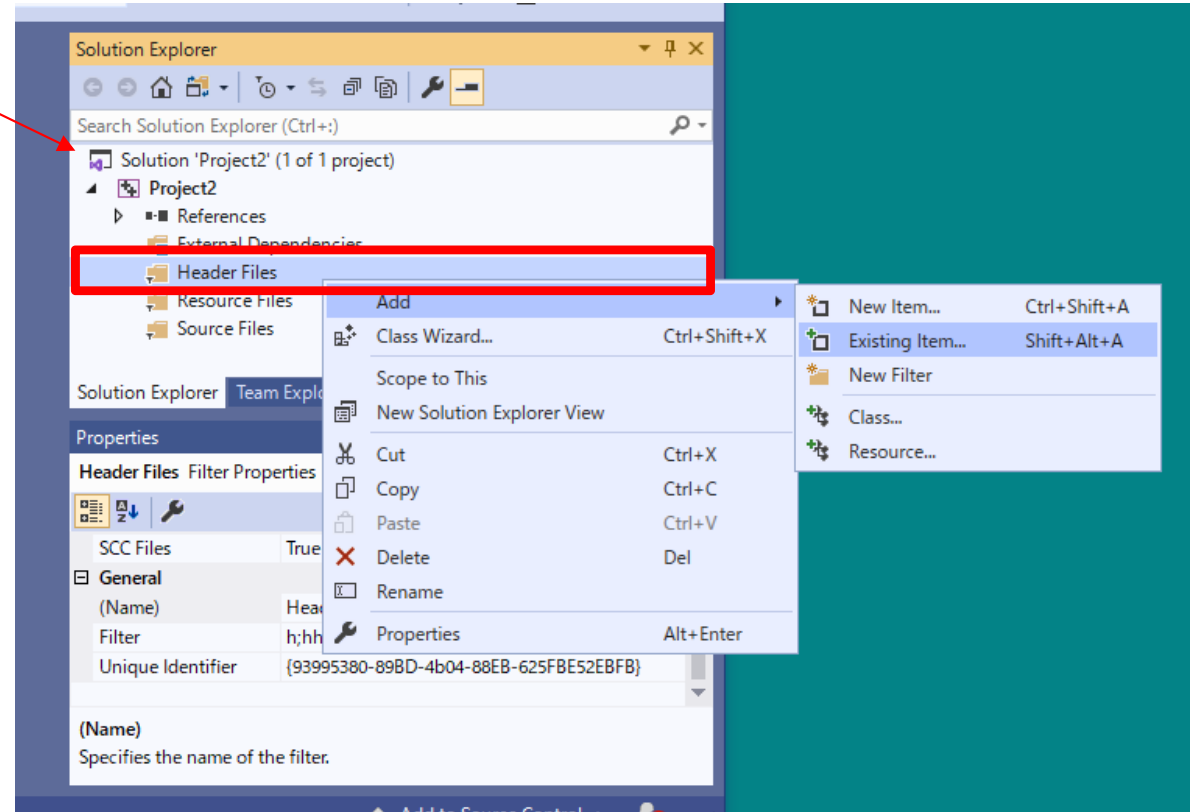

If you use other header files, you should also copy them at the home directory and add them in **Header Files**.



After registration, like this.

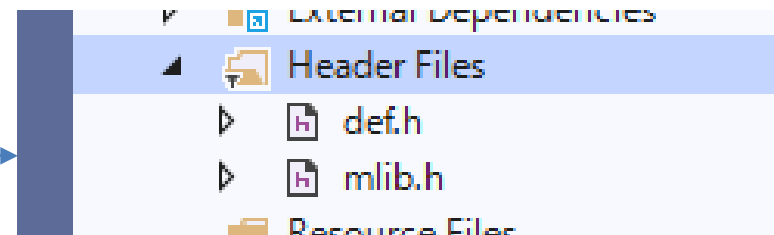


Registering new files to project

Create an original C-source file.

How to add
Right Click **Source files**
Select Add
Select New item
'Add new item wizard' open

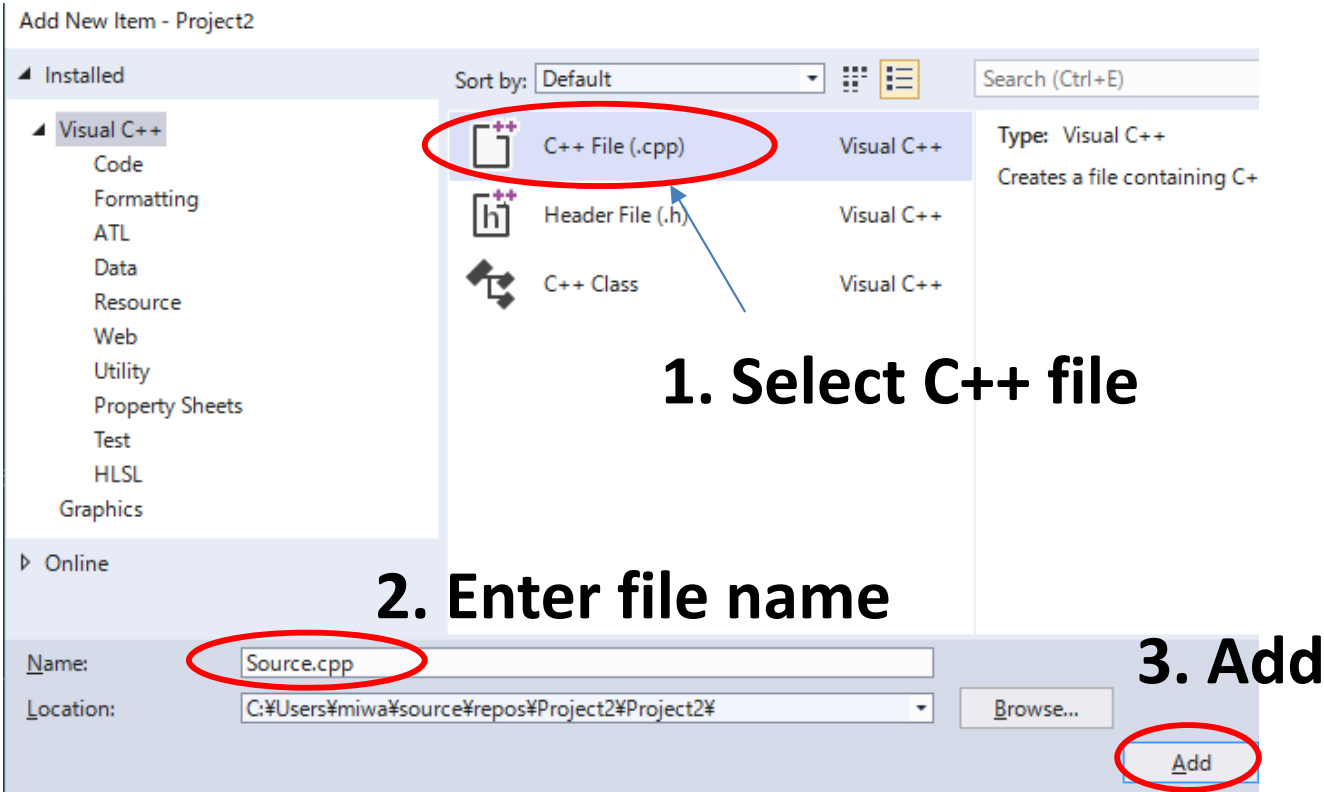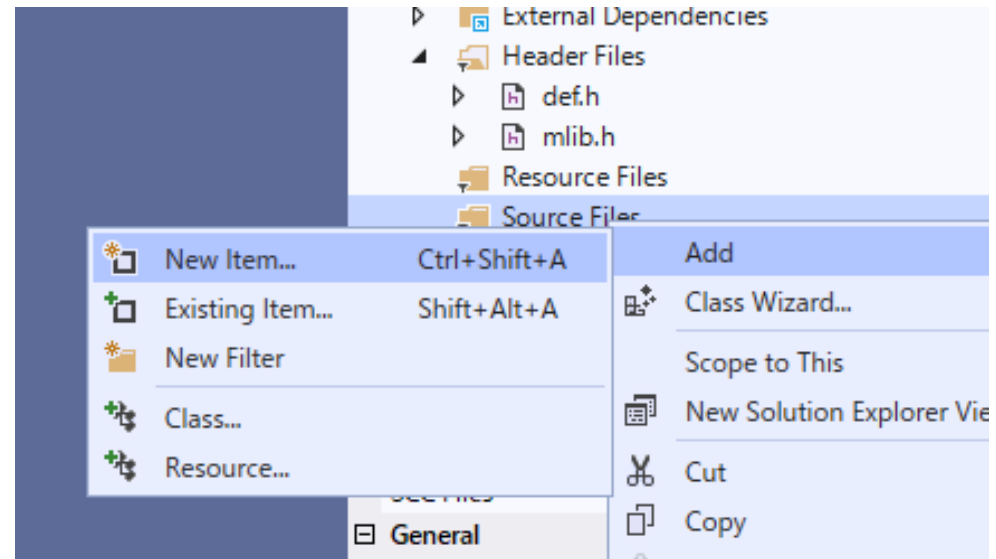

A new source files is created in the home directory.

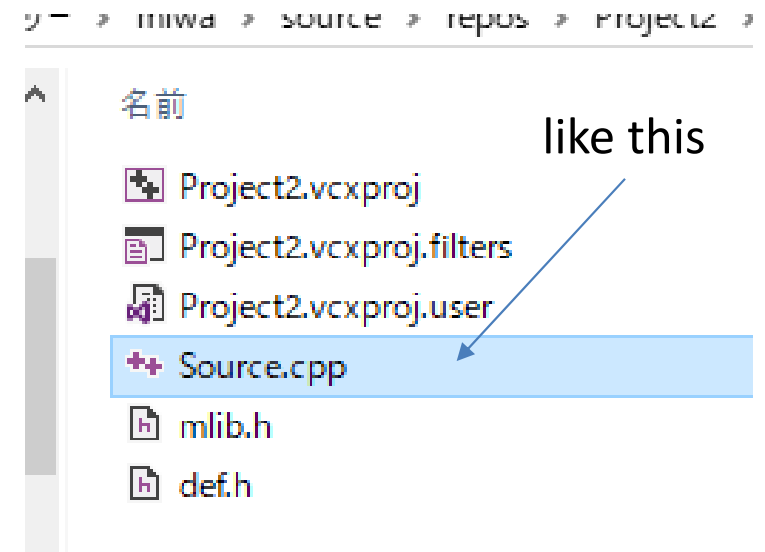

Editing program and build(compile)

2. Start compiling and executing by this button.

The screenshot shows the Visual Studio IDE interface. The main editor window displays the following C code:

```
#include "def.h"
#include "mlib.h"
int main(int Number){
    Printf("Hello World!");
}
```

The code is highlighted in a light green box. The Solution Explorer on the right shows the project structure for 'Project2', including 'Source Files' and 'Source.cpp'. The Output window at the bottom is set to 'Build' and is currently empty. A red circle highlights the 'Run' button (a green play icon) in the top toolbar, with a red arrow pointing to it. A white box with a black border and an arrow pointing to the Output window contains the text: '3. If build(compile) error exists, error messages appear here. Make sure C-source file.'

1. Edit C-source file as follows.

```
#include "def.h"
#include "mlib.h"
int main(int Number){
    Printf("Hello World!");
}
```

3. If build(compile) error exists, error messages appear here. Make sure C-source file.

Building(Compiling)

The screenshot shows the Visual Studio IDE with a C++ project named 'Project2'. The main editor window displays the following code in 'Source.cpp':

```
1 #include "def.h"
2 #include "mlib.h"
3 int main(int Number) {
4     Printf("Hello World!");
5 }
6
```

The Solution Explorer on the right shows the project structure, including 'Source Files' and 'Source.cpp'. The Output window at the bottom shows the build log:

```
1>----- Build started: Project: Project2, Configuration: Debug Win32 -----
1>Source.cpp
1>C:\Users\miwa\source\repos\Project2\Project2\Source.cpp(3,23): warning C4326: ret
1>Project2.vcxproj -> C:\Users\miwa\source\repos\Project2\Debug\Project2.exe
1>Done building project "Project2.vcxproj".
===== Build: 1 succeeded, 0 failed, 0 up-to-date, 0 skipped =====
```


A red text box with the text "Repeat program until there are no build errors." has an arrow pointing to the build output in the Output window. Another text box with the text "If compile passes, The message '1 succeeded, 0 failed' is shown. After that, the program will be executed at once." has an arrow pointing to the source code in the main editor window.

Repeat program until there are no build errors.

If compile passes, The message "1 succeeded, 0 failed" is shown. After that, the program will be executed at once.

Executing Mlib

The following window opens. This is a basic window of MLIB.

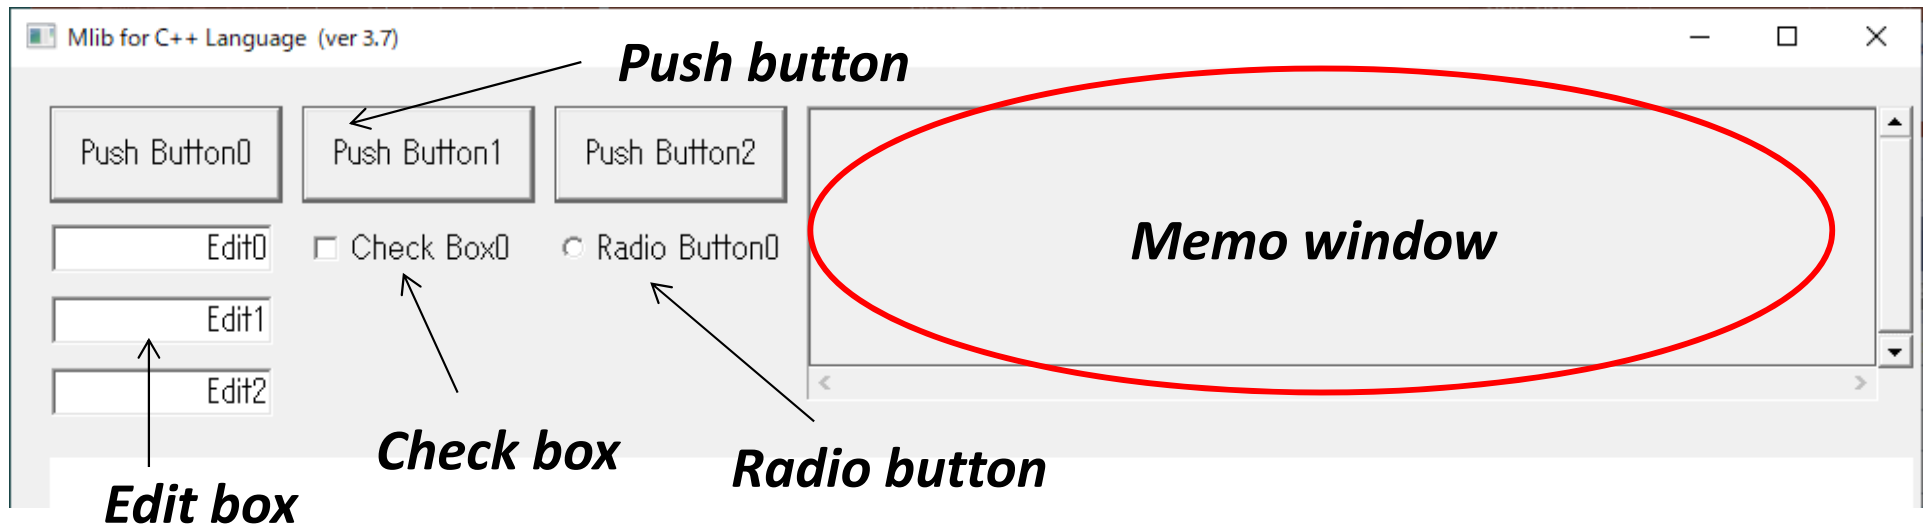

When you click any pushbutton, the program is executed.



“Hello World!” is displayed in the memo window.

How to use Mlib

def.h manages constant, global variables and window conditions such as the number, position and size of the pushbutton, edit box, check box etc.

mlib.h receives and processes messages for window action from Windows system and includes many function groups for data visualization and drawing a simple shape and text.

source.cpp is a main program which you should edit.
The main program should include one 'main()' function.
When any pushbutton is pressed, the 'main()' function is executed.

The numerical value (0,1,2..) for pushbutton number is passed to argument 'Number' of 'main()' function.

The processing in each pushbutton can be changed by the numerical value of argument 'Number' .

Caution: In source.cpp, the include statement for def.h should be ahead of that of mlib.h.

Initial setting of window

def.h sets an initial condition of the window.

```
def.h*  ▾  x  mlib.h  Source.cpp
Project2  (Global Scope)
1  #include<windows.h>
2  #include<tchar.h>
3  #include<stdarg.h>
4  #include<math.h>
5  #include<stdio.h>
6
7  /*****
8  /*  Window Parameter Setting  */
9  /*****
10 #define PROGRAM_TITLE "Mlib for C++ Language (ver 3.7)" // Caption of Title bar
11 #define MAINWIN_W 1000 //Width of main window (in pixel)
12 #define MAINWIN_H 700 //Height of main window (in pixel)
13
14 #define PB_NUM 3 } Push button
15 #define CK_NUM 1 } Check box
16 #define RD_NUM 1 } Radio box
17 #define ED_NUM 3 } Edit box
18 #define ST_NUM 0 } Static
19
20 /*****/
21 /*  end  */
22 /*****/
23
24 /*****/
25 /*  Constant (Never change)  */
26 /*****/
27
28 #define FIGMAX 20 //フィギュアウィンドウに描ける図の最大数
29 #define PALLET_NUM (8*32) //2D画像のカラーマップの階調 (8~256までで8の倍数を指定)
30
31 #define BUFSIZE_W 81 //メモウィンドウの水平文字数
32 #define BUFSIZE_H 1024 //メモウィンドウの記憶行数
```


The number of pixels in height(MAINWIN_W) and in width (MAINWIN_H) of main window.

Set required number of buttons or boxes in main window.

Other constants should not be changed.

The position or size of each button can be changed by Components() function defined latter.

Push button

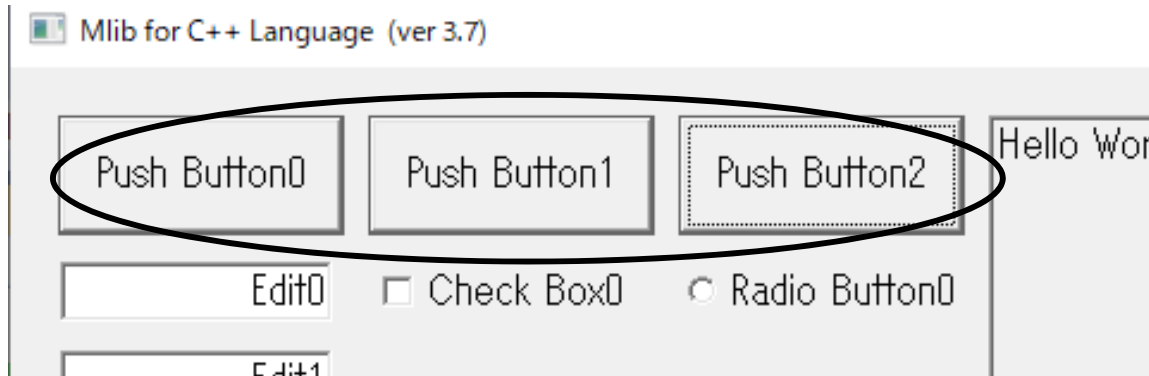

push button executes the main program.

If push button 1 is clicked, the argument 'Number' of 'main' function is set to be 1.

Memo window




Memo window is output area of **P**rintf() function which is compatible to printf() function.

This area can scroll down.

You can check the previous output by a scroll bar.

Check box

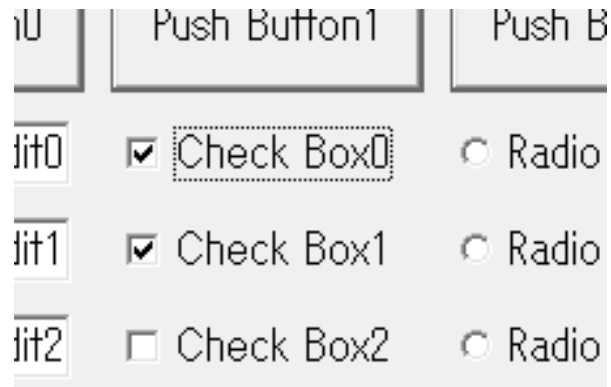


If you click the check box, a check mark is switched.
You can refer the check condition in main program.
by the global variables .

```
sCK[ checkbox number ].chk
```

When a check box is on or off, the value is 1 or 0, respectively.

In the above example, `sCK[0].chk=1` `sCK[1].chk=1` `sCK[2].chk=0`

Radio box

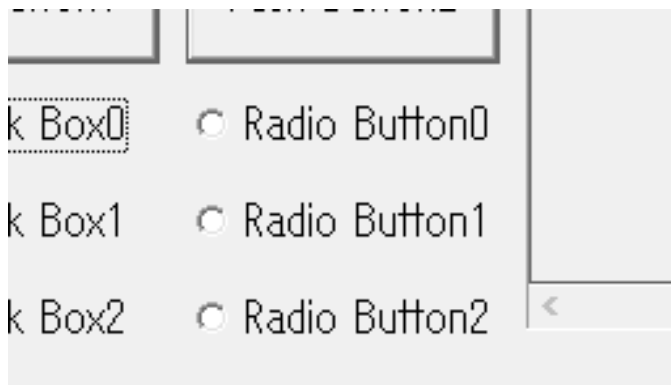

Some radio boxes should be grouping.
One is selected in the group by clicking the radio box .
If you click a radio box, only the selected box is marked.
You can refer the select condition in main program.


```
sRD[ radiobox number ].chk
```

When a radio box is on and off, the value is 1 and 0, respectively.

EDIT BOX

Edit box will hand over a value entered in the box to main program.

It can repeatedly execute the main program with changing a parameter of the program.

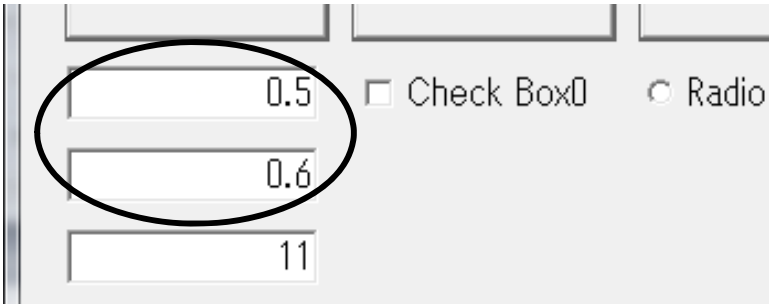

```
int Get_int(int i)
```

```
b=Get_int(1);
```

```
double Get_double(int i)
```

```
a=Get_double(2);
```

These functions allow us to convert the string of the edit box specified by the argument 'i' to an integer or double precision value which is returned as a return value. When the string is not a numerical value, zero is returned.

```
void Set_double(int i , double x)
```

```
Set_double(0,1.2);
```

This function can output a double precision value to the edit box specified by the argument 'i' When the string is not a numerical value, zero is returned.

```
void Set_char(int i, char *Buffer)
```

```
Set_char(0,"ABC");
```

This function can output a string specified by character type array variable 'Buffer' to the edit box specified by the argument 'i'.

Example 1

Create a program that assigns the values entered in edit box #0 and edit box #1 to variables 'a' and 'b', respectively, and outputs the following calculation results in edit box #2.

button #0 → $a + b$

10 Check Box0 Radio Button0

8

18

Addition

button #1 → $a \times b$

10 Check Box0 Radio Button0

8

80

Multiplication

button #2 → $a \div b$

10 Check Box0 Radio Button0

8


1.25

Division

```
int main (int Number){
    double a,b;
    a=Get_double(0);
    b=Get_double(1);

    switch(Number){
        case 0:
            Set_double(2,a+b);
            break;
        case 1:
            Set_double(2,a*b);
            break;
        case 2:
            Set_double(2,a/b);
            break;
    }
}
```

Graphic Window

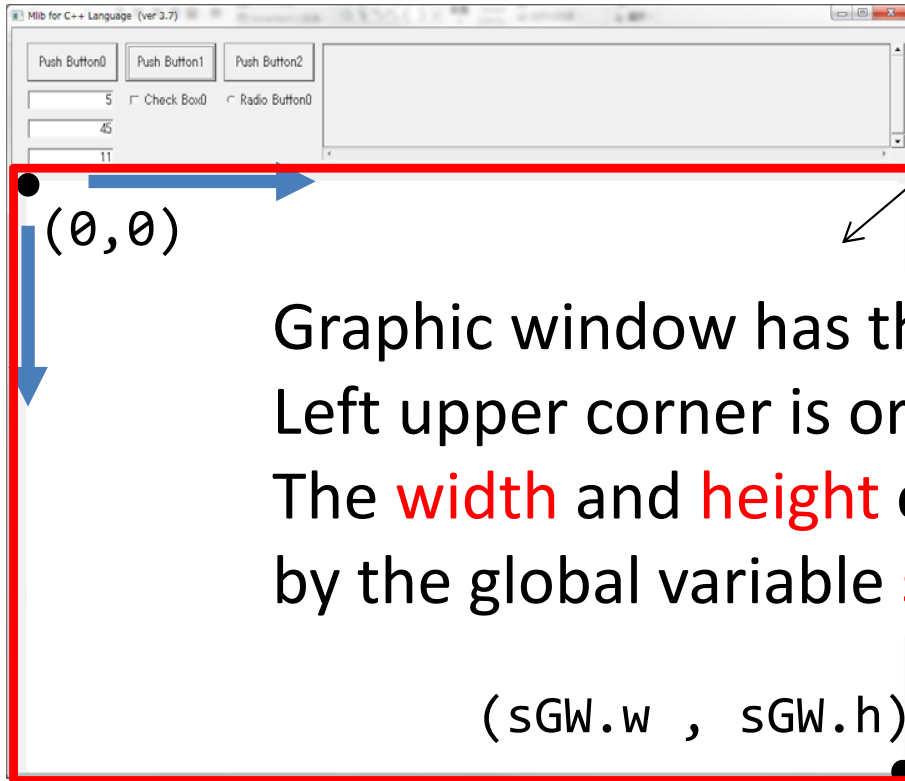

Graphic window

A window where the figure is drawn such as line, circle and rectangle.

Graphic window has the co-ordinate in pixel unit.

Left upper corner is origin point (0,0).

The **width** and **height** of graphic window can be referred by the global variable **sGW.w** and **sGW.h**, respectively.

(sGW.w , sGW.h)

Multiple figure windows can be created in the graphic window.

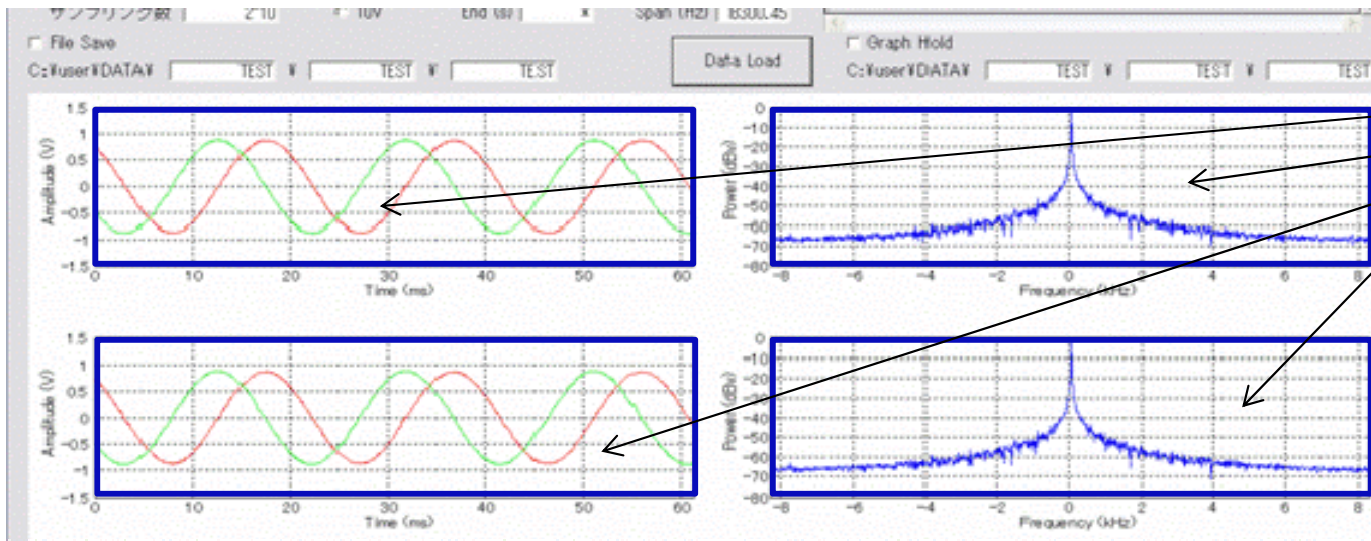


Figure window

Set_figure() function can create figure windows. Each window has an individual x and y-axis.

Free Drawing in Graphics Window


```
void Line(int x1,int y1,int x2,int y2)
```

Draw a straight line in the graphics window

(x1, y1) are the coordinates of the start point.

(x2, y2) are the coordinates of the end point.

(10,20)



(50,100)

Ex.) `Line(10,20,50,100);`

```
void Rect(int x1,int y1,int x2,int y2,int bfflug)
```

Draw a rectangle in the graphics window

(x1, y1) are the coordinates of upper left corner.

(x2, y2) are the coordinates of lower right corner.

Ex.) `Rect(10,20,50,100,1);`

(10,20)



(50,100)


```
void Circle(int x1,int y1,int x2,int y2,int bfflug)
```

Draw an ellipse that touches the rectangle specified by coordinates in the graphics window.

Definition of coordinates is the same as above.

Ex.) `Circle(10,20,50,100,1);`

(10,20)



(50,100)

bfflug {
0 : Only the frame. Do not draw inside the frame.
1 : Fill the frame with the specified color
others: Fill the frame with the white color.

These function used colors and line type specified by `Plot_pen()` function

Creation of figure window


Figure window is a sub-window for graph creation in the graphic window, and each figure window has axis value independent to co-ordinate of the graphic window.

The functions concerned with graph is applied for a figure window

```
void Set_figure(int i1,int i2,int n)
```

Create figure windows with alignment like a matrix consisting of the number columns 'i1' and rows 'i2'

Each figure window is numbered from 1 to $i1 \cdot i2$ as shown in the figure. Left upper position is #1.

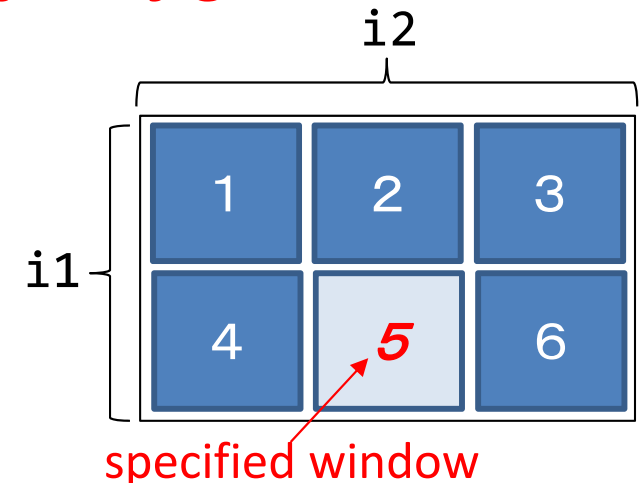

Ex.) `Set_figure(2,3,5);`

The number of the current figure is specified by the argument 'n'.
Once the axis range is fixed, the axis range is used after the second time.

In each figure window, `Set_figure()` should be called at least once before plot functions are called.

Even if the number of plot area is 1, '`Set_figure(1,1,1);`' should be called.

How to draw 1D graph

The most easiest way to draw a 1D graph is to call 'Plot1d()' function.

Plot1D function draws a bent line connected with values of array elements specified by a double precision variable array


```
void Plot1d(double *yn ,int n)
```

```
Ex.) Plot1d(x,100);
```

yn: array variable name defined by double precision type

If you draw a line from the element number of 10, it should be specified as &yn[9] .

n : The number of elements to be drawn.

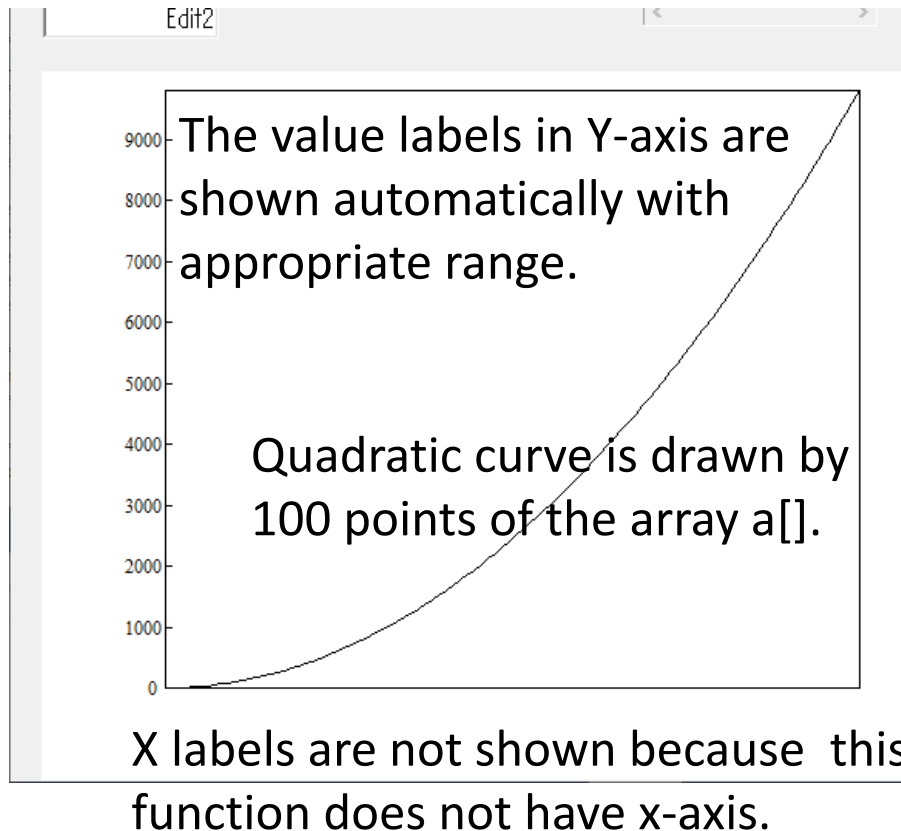

Example 2

```
#include "def.h"
#include "mlib.h"
int main(int Number) {
    double a[100];
    int i;

    for (i = 0; i < 100; i++) {
        a[i] = i * i;
    }
    Set_figure(1, 1, 1);
    Plot1d(a, 100);
}
```


How to draw 1D graph with x-axis


In order to draw 1D graph with x-axis, 'Plotxy()' function is used.

```
void Plotxy(double *xn , double *yn ,int n) Ex.) Plotxy(x,y,100);
```

- xn:** array variable name defined by double precision type for horizontal axis.
- yn:** array variable name defined by double precision type for vertical axis
- n :** The number of elements to be drawn.

Example 3

```
#include "def.h"
#include "mlib.h"
#define pi 3.141592
int main(int Number) {
    double t[100],y[100];
    int i;
    for (i = 0; i < 100; i++) {
        t[i] = (double)i / 100;
        y[i] = sin(2*pi*t[i]);
    }
    Set_figure(1, 1, 1);
    Plotxy(t,y, 100);
}
```

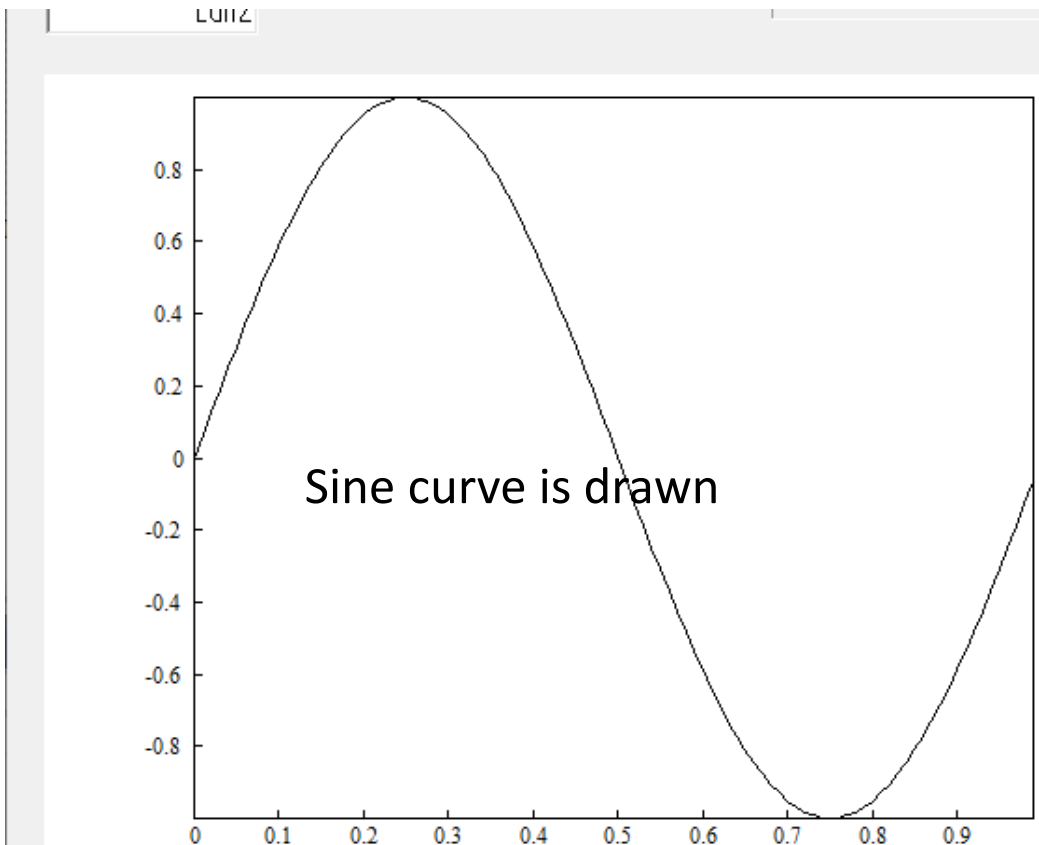

The X-axis labels are also shown automatically

Setting of Axis

```
void Axis_ycap(double min, double max, char *label)
```

```
void Axis_xcap(double min, double max, char *label)
```

Set Y- or X-axis display range and display numerical labels, and captions

min : minimum value to be displayed in Y- or X-axis .

max : maximum value to be displayed in Y- or X-axis .

label : string for caption in Y- or X-axis (less than 100 characters)

Ex.) `Axis_ycap(-1,1,"Time [s]"); Axis_xcap(-1,1,"Amplitude [V]");`

Plot functions called after setting follows the specified display range.

Font specification

Font used in graphic window can be changed in main program before output.

The font information is defined as global constant as follows.

Available font TIMES, CENTURY, TAHOMA, SYLFAEN, MS GOTHIC,
 MS PGOTHIC, MS MINCHO, MS PMINCHO, etc


Ex.) `lstrcpy(Used_Font,TEXT("MS GOTHIC"));`

If you use Italic font, a global variable 'Italic_Font_Flug' should be 1

The Font size is also specified a global variable 'Used_Font_Size'

Ex.) `Used_Font_Size=10;`

Example 4

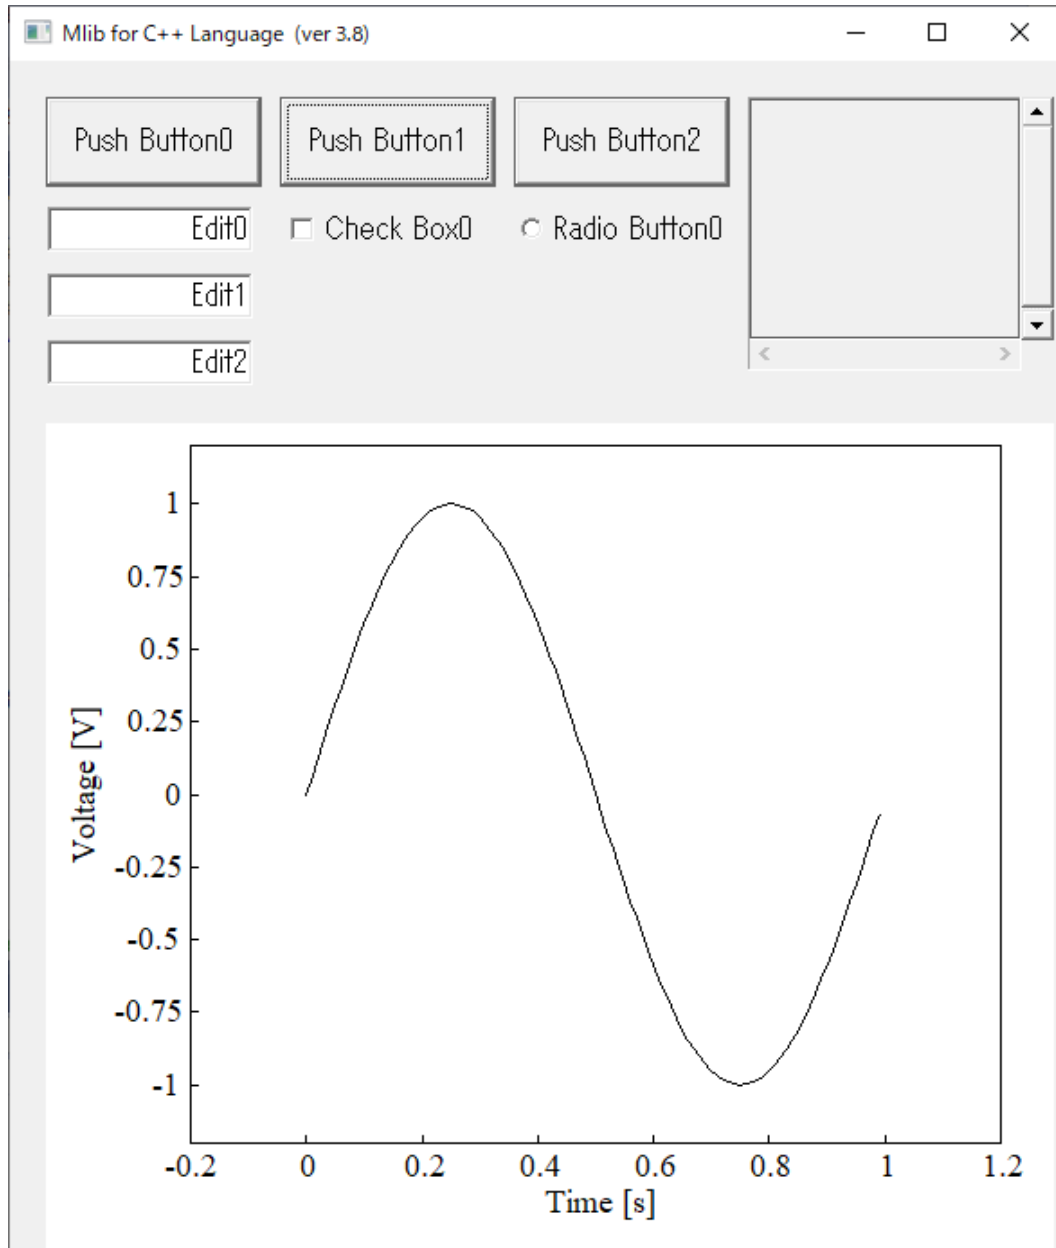

```
#include "def.h"
#include "mlib.h"
#define pi 3.141592

int main(int Number) {
    double t[100],y[100];
    int i;

    for (i = 0; i < 100; i++) {
        t[i] = (double)i / 100;
        y[i] = sin(2*pi*t[i]);
    }

    Set_figure(1, 1, 1);
    Used_Font_Size = 20;
    lstrcpy(Used_Font,TEXT("TIMES"));
    Axis_ycap(-1.2,1.2,"Voltage [V]");
    Axis_xcap(-0.2,1.2,"Time [s]");
    Plotxy(t,y, 100);
}
```

Decoration of drawing (1)

```
void Plot_pen(int pf, int pw, int pc)
```

```
Ex.) Plot_pen(0,0,1);
```

Specify the color and line type to draw in the graphics window.

pf :

0 – Solid line

1 – Dash line

2 – Dot line

3 – Dot-chain line

4 – Two-dot-chain line

pw:

The thickness of the pen.

Specify an integer value

in pixel.

pc:

0- Black

1- Red

2- Green

3- Blue

4- Yellow

5- Magenta

6- Cyan

7- White

8- cycle color

Once this function is called, pen setting is kept for subsequent drawing.

```
void Clf(int clflug)
```

```
Ex.) Clf(1);
```

Erase figure window or graphic window.

- clflug** {
- 1 Draw only the frame of the current figure window (do not erase)
 - 0 Erases the current figure window, and the axis information remains.
 - 1 Erases the current figure window including axis information.
 - 2 Erase the graphic window including all the window information

Decoration of drawing (2)

```
void Text_draw(double x , double y, char* text);
```

例) `Text_draw(10,200,"sin");`

Paste the string specified by argument 'text' in the figure window.

The position (x, y) is based on the coordinates of each axis in the specified figure window.

Can be used to express information such as graph titles and legends

```
void Grid_on(int grflug)
```

例) `Grid_on(3);`

Draw auxiliary lines on the figure window.

Draw a straight line based on the position with the numeric label.

call after setting the axis information such as maximum / minimum value in each axis. (Plot () function, Axis_ycap (), Axis_xcap ())

`grflug` {

- 0: Draw grid line at only 0 level for y-axis
- 1: Draw grid line only for y-axis
- 2: Draw grid line only for x axis
- 3: Draw grid line for both x-axis and y-axis

Decoration of drawing (3)

```
void Aspect_ratio(double ax, double ay)
```

例) `Aspect_ratio(1,1);`

The default figure window sizes are evenly allocated according to the number of windows determined by the `Set_figure()` function.

The window size is changed by a specified ratio represented by (width: height) = (ax: ay) within a range that does not exceed the default size.

Must be called before plot function.

```
void Legend(char* text, int posflug)
```

例) `Legend("a|b|c",4);`

If you draw continuously by `Plot ()` function, it will be overwritten.

`Legend()` function displays legends for the number of the overlaid graphs.


The string of the legend should be written as "line1 | line2 | line3". The name of each line is delimited the character '|' in the string .

the legend position is specified by `posflug` as

0	:	at the bottom right outside the frame
1	:	at the upper left corner of the frame
2	:	at the upper right corner of the frame
3	:	at the lower left corner of the frame
4	:	at the lower right corner of the frame

Example 5

Display the Sinc function as $y = \sin(\pi x) / \pi x$ in the range of $-5 \leq x \leq 5$ with x-axis and y-axis labels. In addition, overwrite $y = 1 / \pi x$ in red and dashed lines. and display the legend.

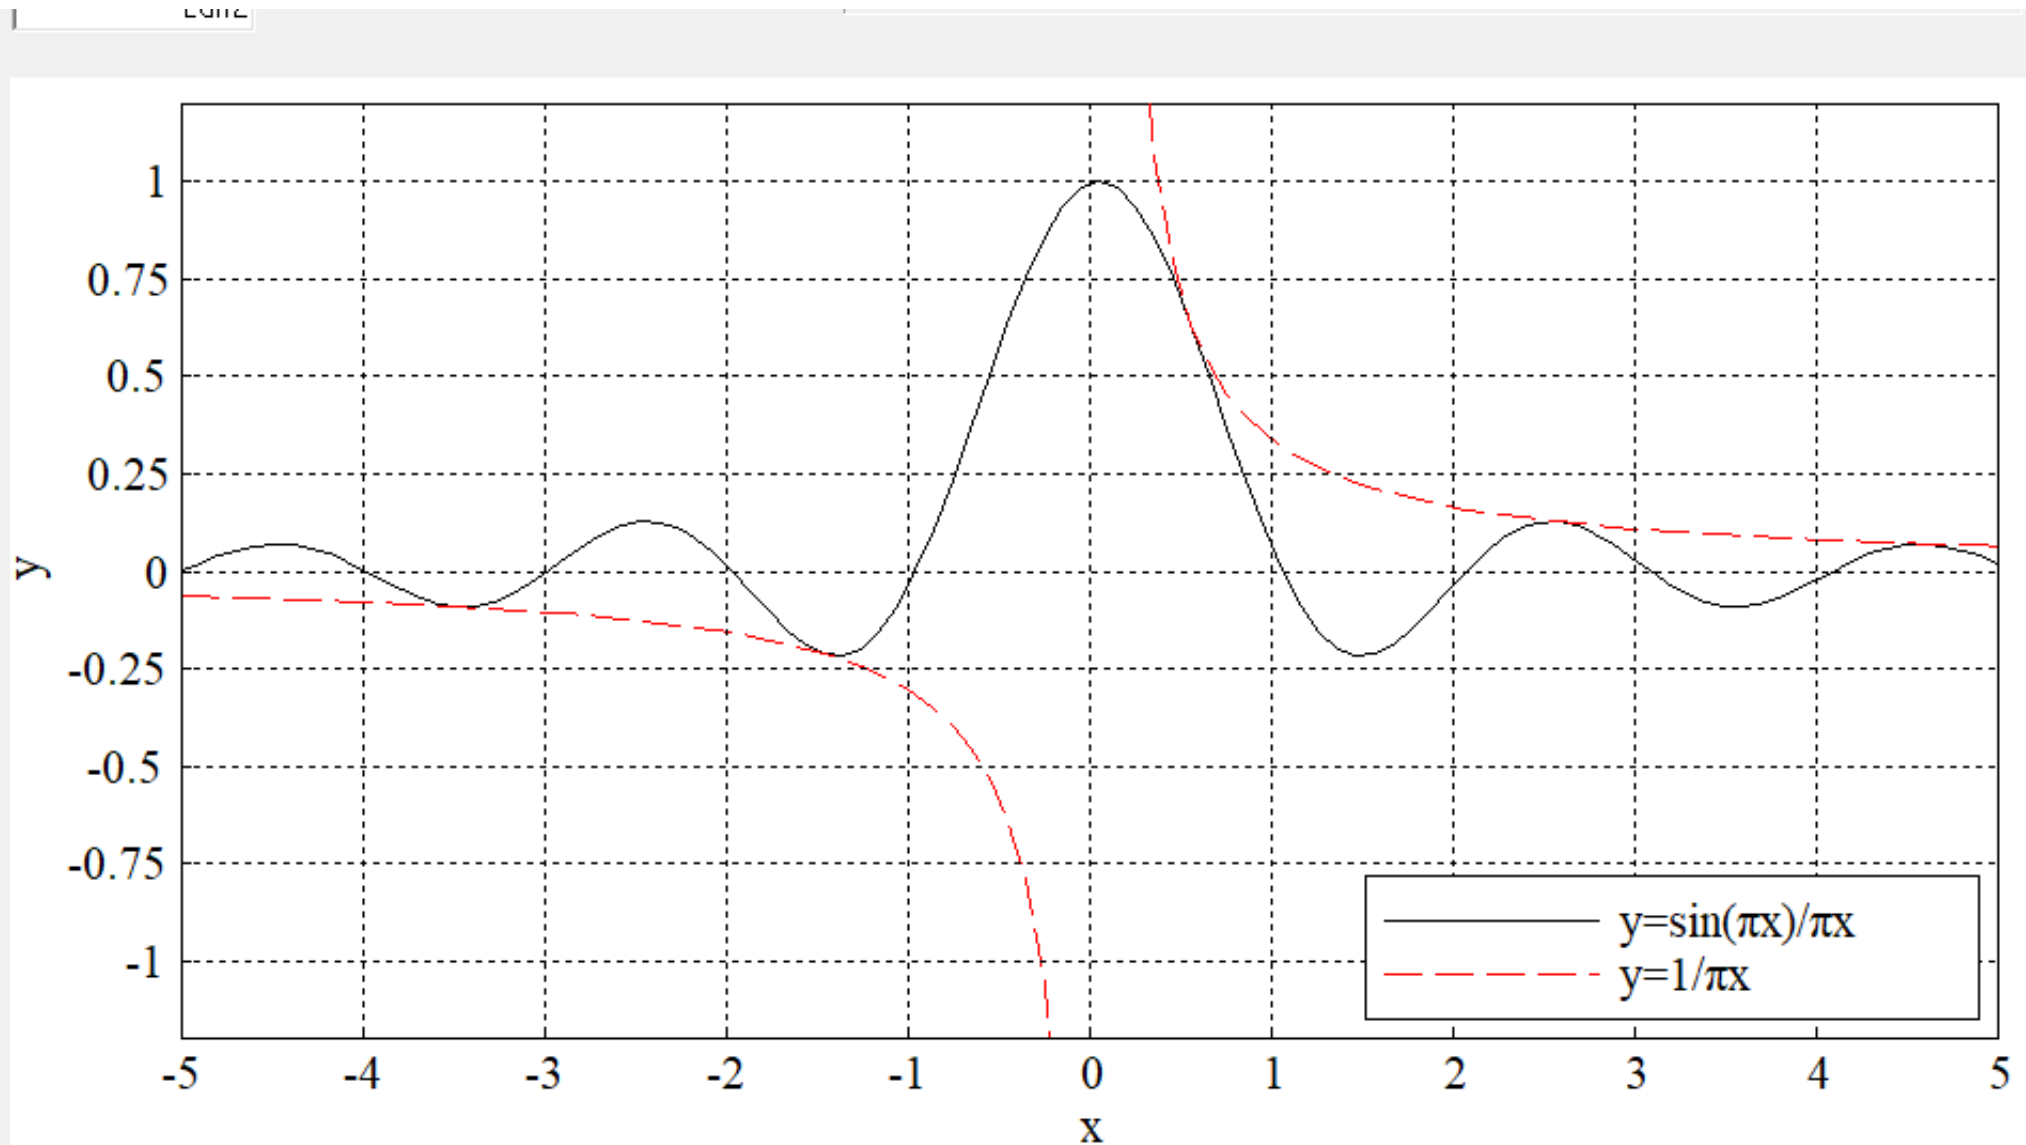

Program of Example 5

```
#define N 100                                Constant setting
#define pi 3.1415926535
int main (int Number){
    int i;
    double x[N],y[N];

    for(i=0;i<N;i++){
        x[i]=10.0/N*i-5.0;                    Setting array data x (-5<x<5) .
        y[i]=sin(pi*x[i])/(pi*x[i]);         Setting array data y=sin( $\pi x$ )/  $\pi x$  using array x.
    }
    y[N/2]=1;                                Caution. When  $x = 0$  ,  $\sin(x) / x$  is Infinity. So, directly specified.
    Set_figure(1,1,1);
    Used_Font_Size=45;
    Axis_xcap(-5,5,"x");                     Setting x-axis range and caption.
    Axis_ycap(-1.2,1.2,"y");                 Setting y-axis range and caption.
    Plotxy(x,y,N);                            plot data y with x.

    for(i=0;i<N;i++){
        y[i]=1.0/(pi*x[i]);                  Setting array data y=1/  $\pi x$  using array x.
    }
    Plot_pen(1,1,1);                          Change pen condition to red color and dashed line.
    Plotxy(x,y,N);                             Overwrite a graph
    Grid_on(3);                                Add grid line
    Legend("y=sin( $\pi x$ )/ $\pi x$ |y=1/ $\pi x$ ",4);    Insert legend of the graphs
}
```





Example 6

```
int main (int Number){
    int i;
    double pi=3.1415926535;
    double x[N],y[N],t[N];
    for(i=0;i<=N;i++){
        t[i]=3.0/N*i+1;
        x[i]=cos(pi*t[i])/(pi*t[i]);
        y[i]=sin(pi*t[i])/(pi*t[i]);
    }
```

```
Used_Font_Size=30;
Set_figure(2,2,4);
Axis_xcap(1,4,"t");
Axis_ycap(-0.3,0.3,"y");
Plot1d(y,N);
```

```
Set_figure(2,2,1);
Aspect_ratio(1,1);
Axis_xcap(-0.3,0.3,"x");
Axis_ycap(1,4,"t");
Plotxy(x,t,N);
```

```
Set_figure(2,2,3);
Aspect_ratio(1,1);
Axis_xcap(-0.3,0.3,"x");
Axis_ycap(-0.3,0.3,"y");
Plotxy(x,y,N);
Grid_on(3);
}
```

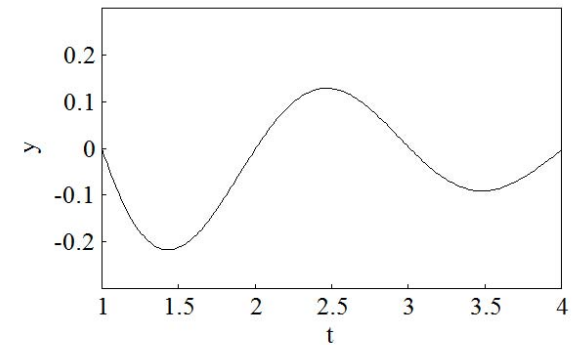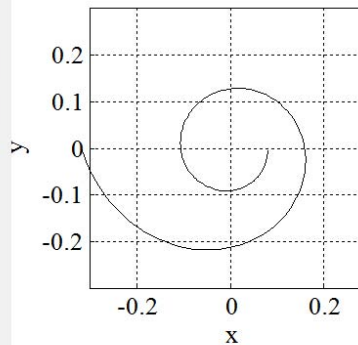
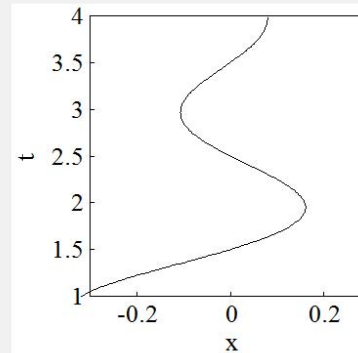


Example 7

Create programs to draw straight lines and squares corresponding to push buttons 0 and 1, respectively.

The line style, thickness and color are specified by the integer values entered in edit boxes 0, 1, and 2 which correspond to the three arguments of the Plot_pen () function.

Push button 2 fills the square area with white color for erasing the drawings.

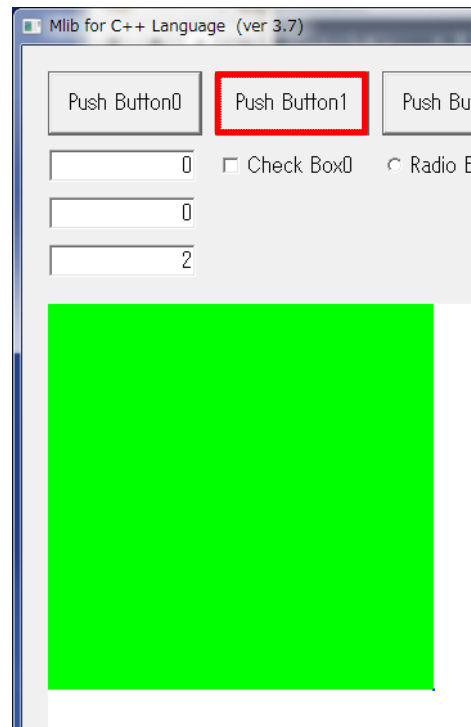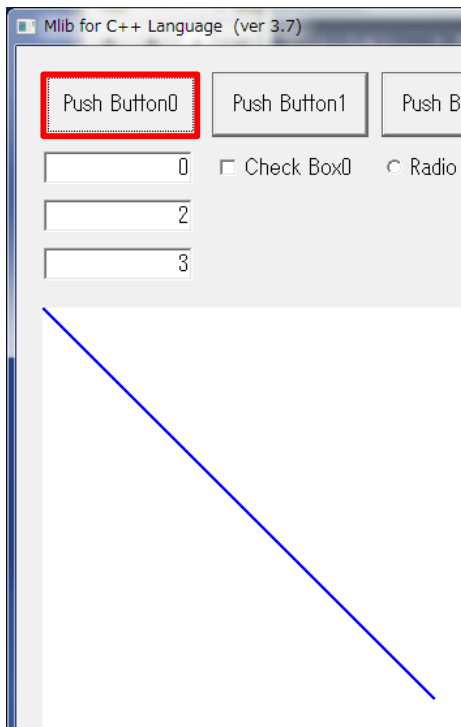

```
int main (int Number){
    int a,b,c;
    a=Get_int(0);
    b=Get_int(1);
    c=Get_int(2);

    Plot_pen(a,b,c);

    if (Number==0){
        Line(0,0,300,300);

    } else if (Number==1){
        Rect(0,0,300,300,1);

    } else {
        Plot_pen(0,1,7);
        Rect(0,0,300,300,1);
    }
}
```

How to move drawings (animation)

The simple way to animate a figure is to repeat a process of drawing and erase.

In this procedure, 'refresh of window' is important. All the drawing functions is drawn not directly in the display but in the memory of PC. The graphic data in the memory is displayed only after the main function is finished.

So, when you want to move drawing, the memory data in end of each repetition should forced to be displayed. This operation is done by a 'refresh()' function as 'refresh of window'.

The variable 'j' is a counter of repetition in which sine wave data is created, erased and plotting and window is refreshed.

```
#include "def.h"
#include "mlib.h"
#define pi 3.141592
#define N 1000
int main(int Number) {
    double t[N], y[N];
    int i,j;
    Used_Font_Size = 20;
    lstrcpy(Used_Font, TEXT("TIMES"));
    for (j=0;j<100;j++){
        for (i = 0; i < N; i++) {
            t[i] = (double)i / N;
            y[i] = sin(2 * pi *j* t[i]);
        }
        Clf(2);
        Set_figure(1, 1, 1);
        Axis_ycap(-1.2, 1.2, "Voltage [V]");
        Axis_xcap(-0.2, 1.2, "Time [s]");
        Plotxy(t, y, N);
        Refresh();
    }
}
```

Frequency changes by the variable j

Erase figure

Plot figure

Refresh of window

Example 8